

JUICE ATTITUDE



DODGE JUICE
INSTALLATION INSTRUCTIONS

TABLE OF CONTENTS

1998.5 to 2002 5.9L (24V)

Supplied Items List.....	4
Harness Overview.....	6
Required Tools.....	6
Constant Power.....	7
Key-On Power.....	8
MAP Sensor.....	9
Data Link.....	10
Injection Pump.....	11
Ground Connection.....	12
Boost Elbow Install.....	13
Fuel Pressure Sensor.....	14
Fuel System Bleeding.....	15
Automatic Transmission.....	16
Standard Transmission.....	17

2003 to 2004 5.9L (CR)

Supplied Items List.....	19
Harness Overview.....	20
Required Tools.....	20
Constant Power.....	21
Injector Connections.....	22
MAP Sensor Connections.....	23
Fuel Pressure Sensor.....	23
Data Link Connection.....	23
Boost Elbow (Optional).....	24
Ground Connection.....	25

2004.5 to 2005 5.9L (600)

Supplied Items List.....	26
Harness Overview.....	28
Required Tools.....	28
Turbo Timer (Optional).....	28
Constant Power.....	29
Injector Connections.....	30
MAP Sensor Connection.....	31
Data Link Connection.....	31
Ground Connection.....	32

2006 to 2014 5.9L & 6.7L

Supplied Items List.....	34
Harness Overview.....	35
Required Tools.....	35
Power Connections.....	36
Injector Connections.....	38
Injector Connection Tips.....	39
MAP Sensor.....	39
Turbo Timer Connection.....	40
Data Link Connection.....	41
Ground Connection.....	41

EGT Probe Installation (All Years)

Required Tools.....	42
Supplied Items.....	42
Locations.....	42
ThreadTapping.....	43
Probe Insertion.....	44
Juice Connection.....	45

EAS (JAB) Installation (All Years)

EAS Connections.....	46
Cable Routing.....	46
Fastening the EAS.....	47

Final Installation (All Years)

CS/CTS Connect.....	48
Juice Module.....	49
Reconnect.....	49


Appendix

Product Registration.....	50
Juice Module.....	49
Reconnect.....	49


1998.5 to 2002 5.9L (24V) - Supplied Items List

Note: Depending on your year of truck, you may not need everything provided.

⑦ Fuel Pressure Sensor - 1 each



⑧ Banjo Bolt - 1 each





⑨ Washers - 2 each



① Quick Install Guide - 1 each



② EGT Probe - 1 each

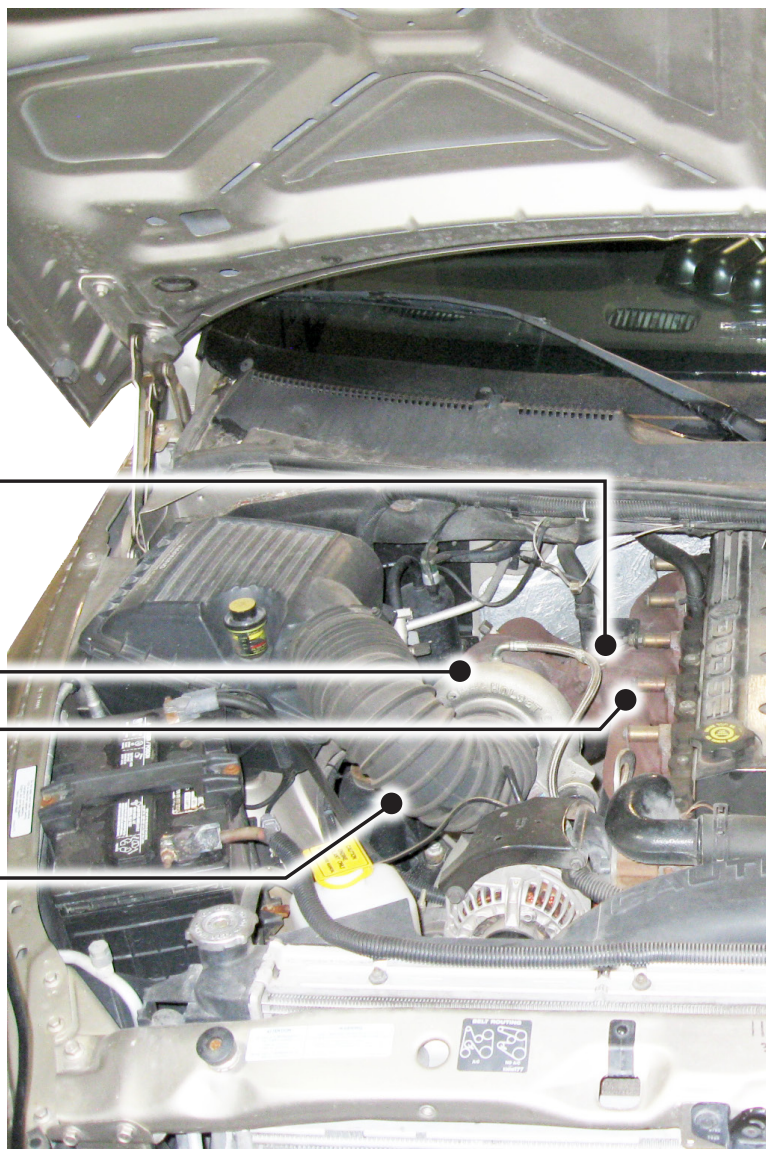

Turbo

Exhaust Manifold

③ Brass Fitting - 1 each




④ Hose Clamp - 1 each




⑤ Zip Ties - 10 each




⑥ Transmission Temperature Sensor - 1 each



⑩ Main Wiring Harness - 1 each

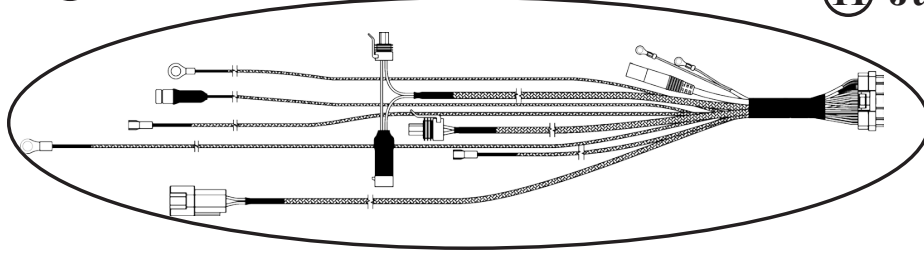

⑪ Juice Module - 1 Each



⑫ Velcro - 2 each




Fuel Filter Location

VP44 Pump Location

Fire wall Grommets

EAS Install Location

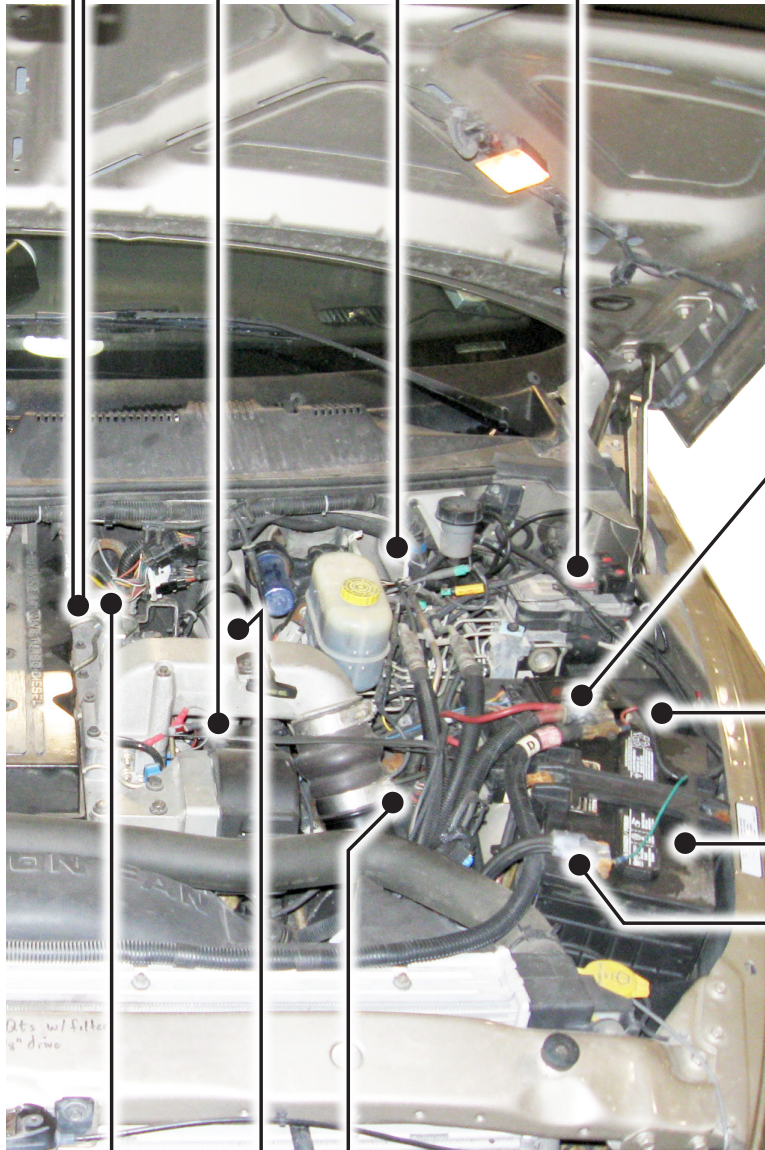

⑬ Fuse Link - 2 each



Fuse Box

Battery


Ground Connector Location

98.5-99 Data Link

00-02 Data Link

98.5-02 MAP Sensor

⑭ 2000 (Data Link Adapter)




1 each

⑮ 2001-2002 (MAP Adapter)



1 each

1998.5 to 2002 5.9L (24V) - Harness Overview

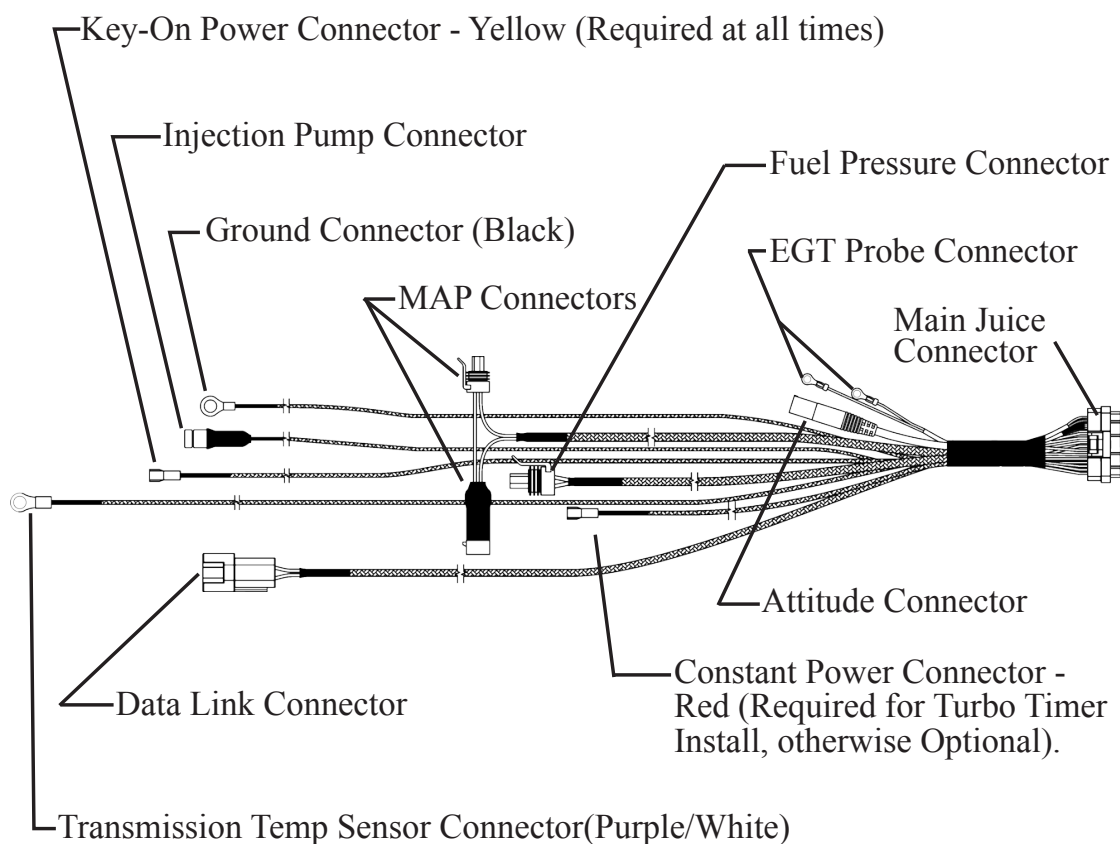

NOTE: Data Link and MAP connectors may vary from this view depending on your vehicle year. If this is the case, you will need to use the supplied adapters.)

1998.5 to 2002 5.9L (24V) - Required Tools

- | | |
|------------------------------|----------------------|
| -Knife | -RTV Silicone Sealer |
| -2 to 3 ft of wire (fishing) | -Teflon Tape |
| -Needle nose pliers | -Pipe Thread Sealant |
| -Phillips screwdriver | |
| -Flat tip screwdriver | |
| -3/8" Drive Torque Wrench | |
| -1/2" Wrench | |
| -3/8" Drive Ratchet | |
| -1/4" Socket | |
| -5/16" Socket | |
| -7/16" Deep Well Socket | |
| -10mm Socket | |
| -13mm Socket | |
| -1/8" NPT Tap | |
| -5/16" or 21/64" Drill Bit | |

1998.5 to 2002 5.9L (24V) - Constant Power





1. Using the 1/2" wrench, loosen both negative battery cables.


2. Remove cables from the battery posts and set aside. **NOTE: DO NOT reconnect until installation is complete. Connecting power may cause fault code in the ECM.**

3. Locate and remove the 10 Amp "A/C Clutch" fuse from inside the engine compartment fuse panel.

4. Insert the Leaded Fuse link. The leg with the wire soldered to it needs to plug into the "HOT" side of the fuse location. Orient the fuse exactly as shown below.

5. From the main harness, connect the Red Constant Power Connector to the installed Fuse Link.

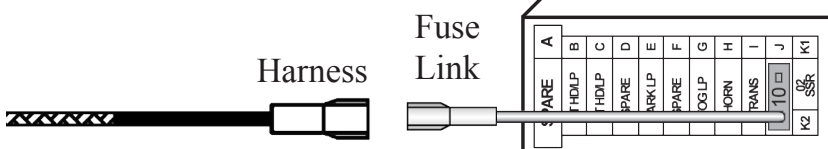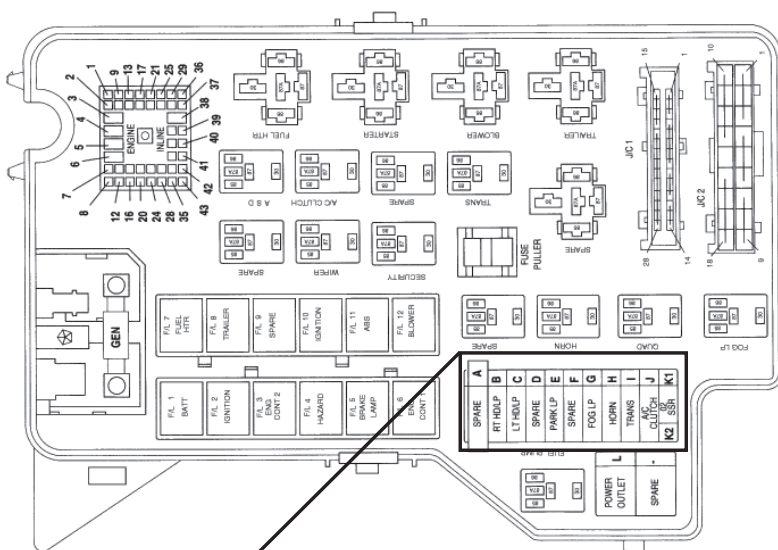

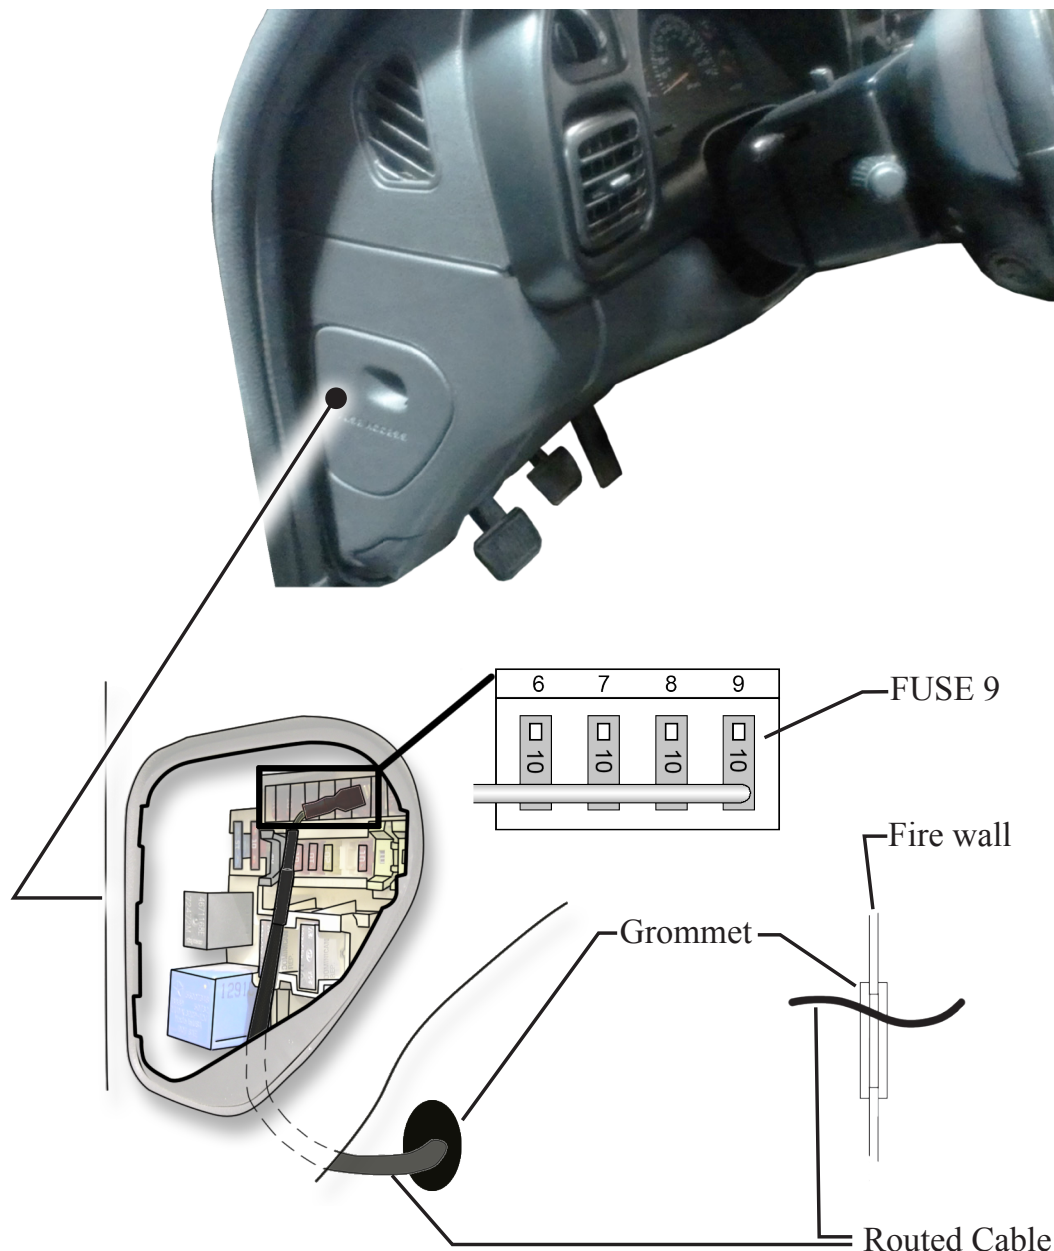

1. Cut a 1/2" slit in the fire wall grommet.

NOTE: Automatics - easy access is the clutch hole grommet located to the left of the fire wall brake hole. ***Manuals or Automatics-*** Use the large vehicle wiring harness grommet on the fire wall.

2. Route the Yellow Key-On Connection from the engine compartment to inside the cab through the cut hole from step 1.
3. Locate and remove Fuse 9 (10 Amp) from inside the driver side fuse panel.
4. Insert the Leaded Fuse link. The leg with the wire soldered to it needs to plug into the "HOT" side of the fuse location. Orient the fuse exactly as shown in Figure 4 below.
5. Connect the Yellow Key-On (routed in step 2) to the installed Fuse Link.


1998.5 to 2002 5.9L (24V) - MAP Sensor




1. Disconnect the stock wiring harness from the boost sensor located at the rear of the fuel filter housing.

2. Plug the Edge harness MAP connectors in between the truck MAP sensor and the truck MAP sensor cable. For 01-02 year trucks, the MAP adapter is needed.

98.5-00 Trucks

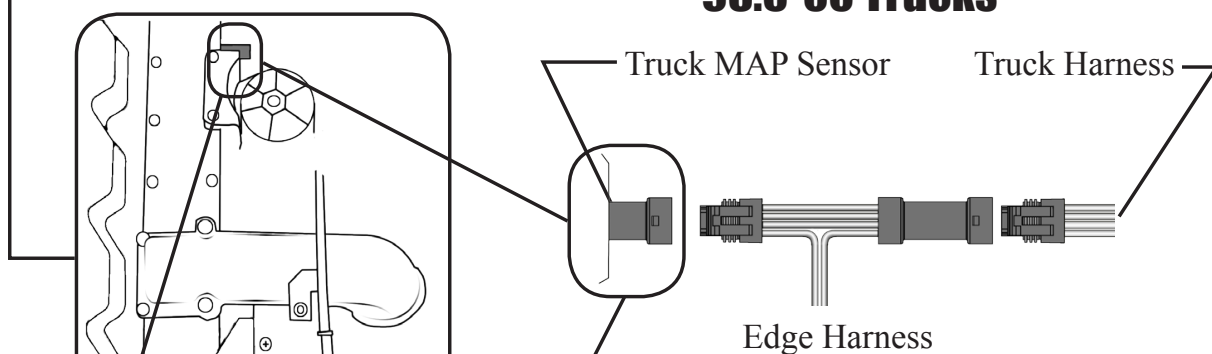

01-02 Trucks

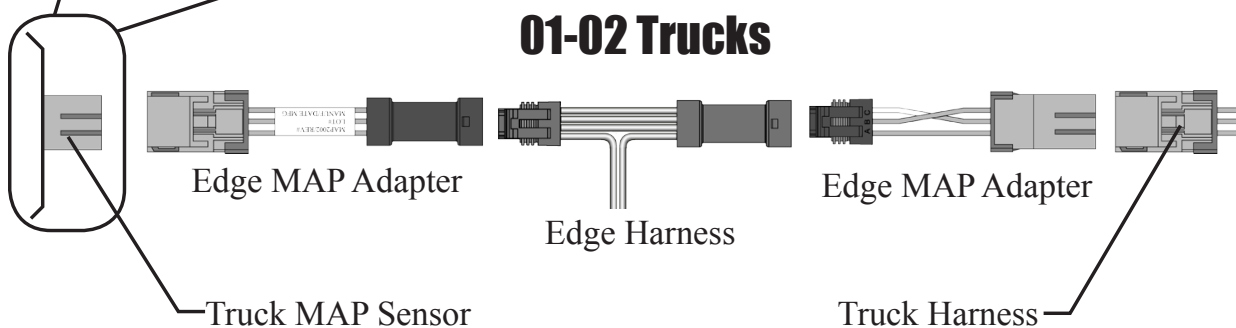




1. Locate the Data link connectors:
 - 1998.5 - 1999: The triangle shaped connector is located on the driver's side of the engine in the wiring harness near the power steering pump.


- 2000 - 2002: The three pronged flat connector is located on top of the fuel lift pump that is located on the driver's side of the engine directly below the MAP sensor.

NOTE: On some 2001 trucks the Data Link connector can be located on the driver's side of the engine in the wiring harness near the power steering pump.


2. Replace the protective plug on the truck Data Link with the Juice harness Data Link Connector as shown below.

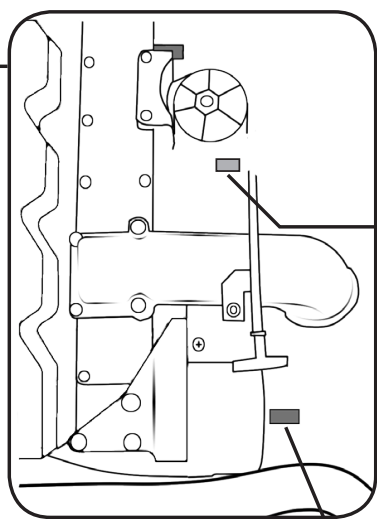

00-02 Trucks

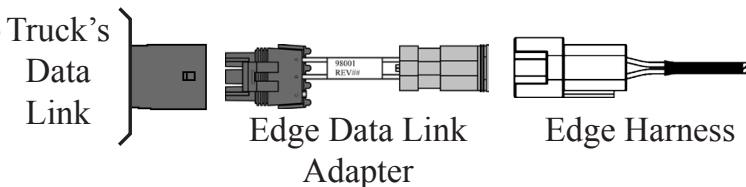


98.5-99 Trucks

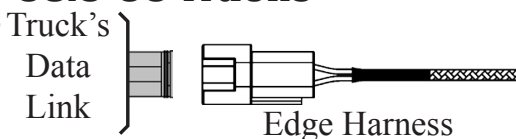

1998.5 to 2002 5.9L (24V) - Injection Pump



1. Unbolt and remove the casting that attaches to the Throttle Position Sensor (TPS) housing.

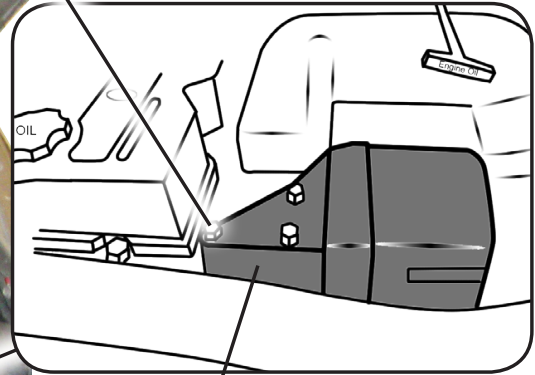


TPS Housing

2. On the Fuel Pump, partially remove the insulation that covers both pump wires.

3. Locate the TOP injection pump wire. **NOTE: This will be the wire on the top, closest to the engine block.**

4. Unscrew the Posi-Tap®. Place the wire in the slot cap's slot.


5. Place a single drop of RTV Sili-cone Sealer into the cap. The sealer provides a water tight seal in and around the connection.

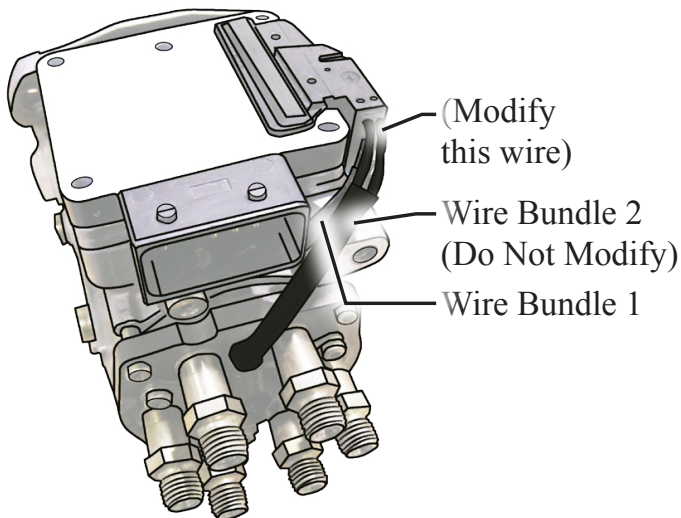

VP44 Fuel Pump

6. Pre-twist the body of the Posi-Tap® counter clockwise with about seven full turns before twisting on to cap.

NOTE: This will pre-load the wire so that when the body of the Posi-Tap® is installed on the cap, the wire will not remain twisted in the wire harness.

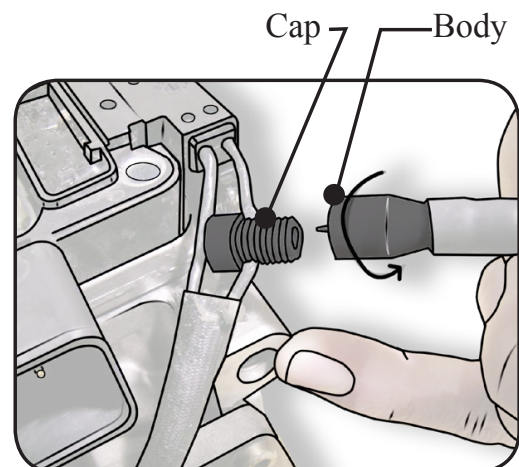

7. Twist harness onto cap until tight.

1998.5 to 2002 5.9L (24V) - Ground Connection




1. Remove the nut on the NEGATIVE battery terminal/cable.
2. Slide the ring terminal onto the bolt, then replace the nut. This will tightly hold the ring terminal in place.
3. Tighten the nut accordingly.



NOTE: On some vehicles, there is a solid line and cannot be replaced with a brass elbow.

1. Using the 5/16" socket, loosen the two clamps securing the air induction hose to the air filter housing and the turbo inlet.

2. Remove the hose and set it aside.

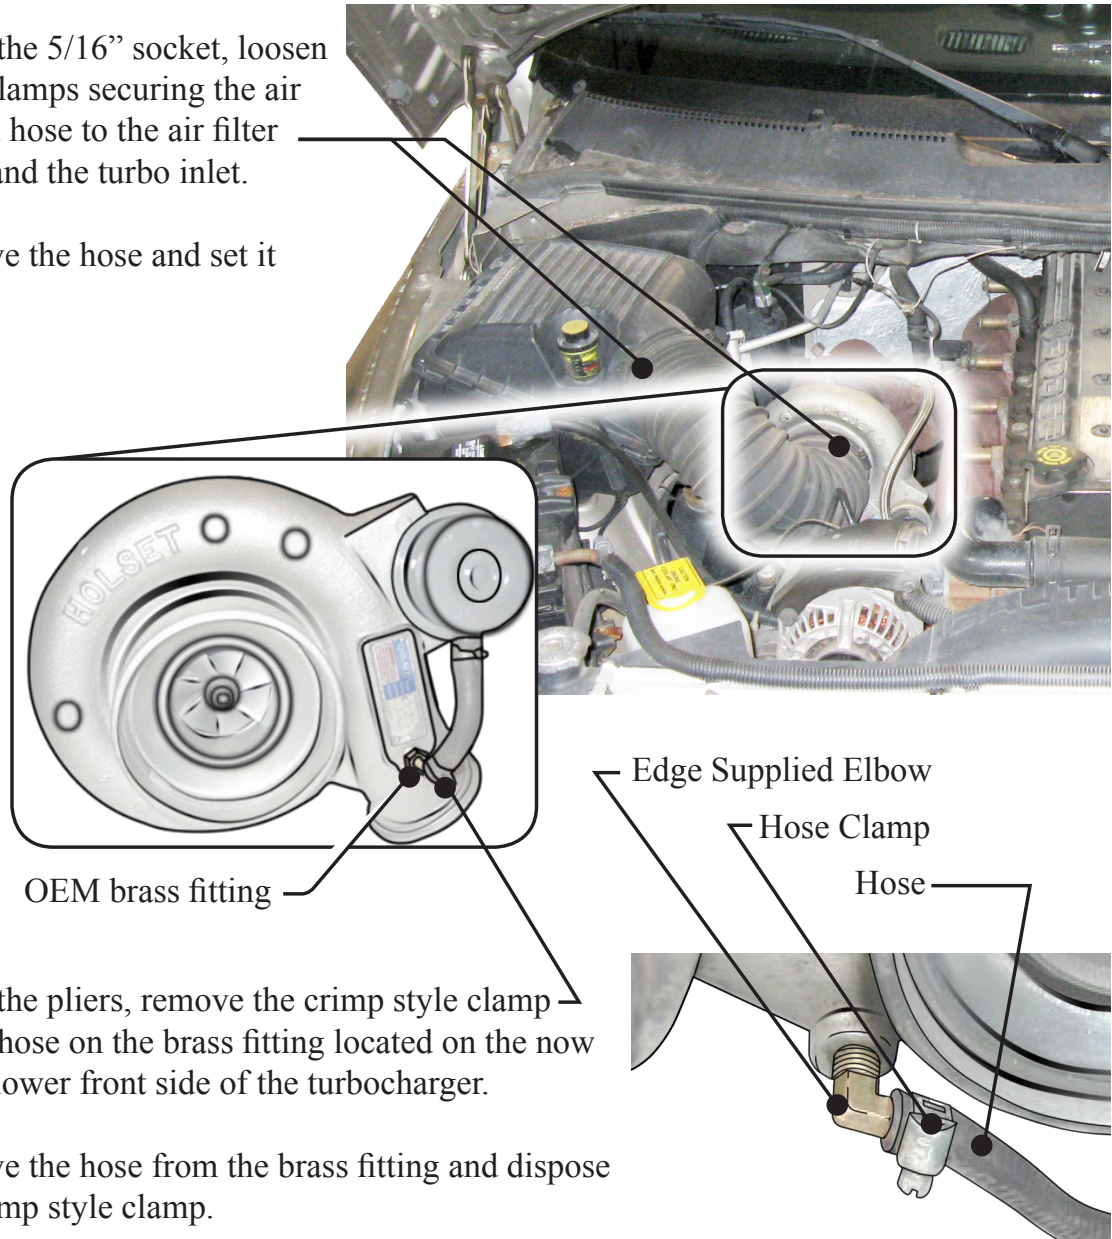

3. Using the pliers, remove the crimp style clamp from the hose on the brass fitting located on the now exposed lower front side of the turbocharger.

4. Remove the hose from the brass fitting and dispose of the crimp style clamp.

5. Using the 7/16" wrench, unscrew the stock brass fitting.

6. Install the supplied brass fitting. Tighten while being careful not to over-tighten.

7. Slip the supplied hose clamp onto the stock hose then the stock hose onto the new brass fitting. Tighten the hose clamp with the 1/4" socket.

8. Re-connect the air induction hose to the air filter housing and turbocharger inlet.


9. Using the 5/16" socket, tighten both clamps securely.

1998.5 to 2002 5.9L (24V) - Fuel Pressure Sensor

CAUTION: If you lack experience or tools to bleed the fuel system take the truck to an experienced mechanic for installation of the fuel pressure sensor!

CAUTION: The fuel that is pumped to the injectors also acts as a lubricant for the Bosch VP-44 high pressure pump. A loss of fuel pressure to the high pressure pump may result in permanent damage to the high pressure pump.

NOTE: Fuel Filter Housing (Optional placement of Banjo bolt for 1999 Trucks only).

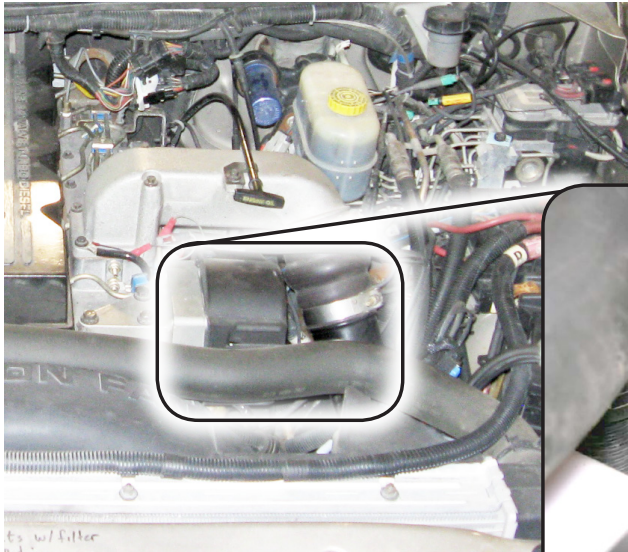


1. Locate the fuel pump.



2. Thread the fuel pressure sensor into the supplied banjo bolt.

Fuel Pressure Sensor




Edge Banjo Bolt

3. Remove the stock banjo bolt from the injector pump supply line located on the VP44 with the pre-installed neoprene washer and fuel pressure sensor.


4. Tighten bolt to the appropriate torque specifications (18 ft-lbs)

VP44 Fuel Pump Method

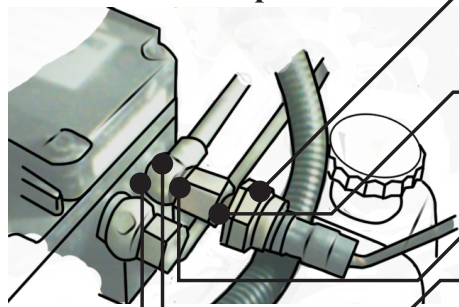

Fuel Supply Line

Fuel Filter Method (1999 Only)



CAUTION: *When the Fuel Supply Line is removed, fuel can drain out of the VP 44 pump, and air can enter the line and/or pump. In order to minimize the amount of air that is let into the fuel system, pre-install the fuel pressure sensor onto the supplied banjo bolt before removing the stock banjo bolt from the pump. Tighten the sensor into the banjo bolt until it is snug.*

CAUTION: *IT IS CRITICAL THAT THE AIR INTRODUCED INTO THE FUEL LINE BE REMOVED FOR THE FUEL SYSTEM TO OPERATE PROPERLY.*

NOTE: *Use this bleeding procedure at the end of the installation. Trying to bleed the fuel system half way through the installation could cause a check engine light.*

1. In order to remove the air from the system, loosen BUT DO NOT REMOVE the overflow valve banjo fitting that connects to the return line.
2. Place a shop rag or towel around the banjo fitting to catch excess fuel.
3. Turn the ignition key to CRANK position and quickly release the key to the ON position.

CAUTION: *DO NOT START THE ENGINE! The fuel lift pump will operate for up to 25 seconds.*

4. Once this procedure is complete, tighten the return line banjo fitting and torque to 24 Nm (18 ft-lbs).
5. Attempt to start the engine.


NOTE: *The engine may be very noisy or run erratic for a few minutes. Keep an eye on the fuel pressure as displayed on the Attitude. If the pressure drops below 4 psi, or the engine quits running, re-bleed the fuel system. If the engine still does not start, remove and check the fuel filter. If the filter is dirty or damaged, replace the filter.*

CAUTION:

•*Do not engage the starter motor for more than 30 seconds – Allow two minutes between cranking intervals.*

•*Although it is rare, on occasions the LIFT pump may fail to prime after the banjo bolt has been replaced signifying a possibility of a worn pump. In this rare instance the LIFT pump should be replaced.*

6. Reinstall the throttle bracket onto the fuel injection pump using the three bolts. Torque these bolt to 18 ft-lbs using a torque wrench and 13mm socket.

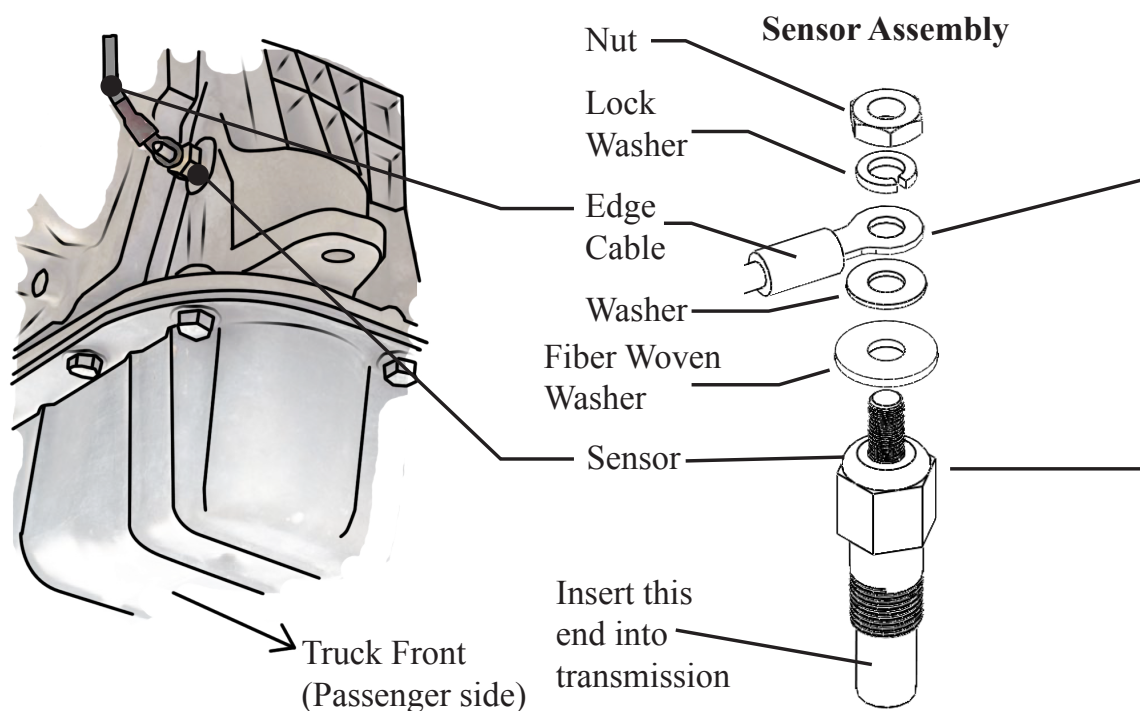

1. Unbolt the stock plug from the rear passenger side of the transmission using a 7/16 inch (11mm) wrench.


NOTE: *A small amount of transmission fluid will leak from the outlet.*

2. Apply Teflon tape to the threads of the transmission temperature sensor.

3. Using a ½ inch wrench, thread the Edge supplied transmission oil temp sensor (shown above) and connect the cable using the supplied nut.

4. From the top of the engine, route the edge cable along the factory wiring harness and over the top of the transmission and secure with supplied wire ties.

NOTE: ONCE YOUR TRANSMISSION SENSOR IS IN PLACE, REFER TO THE “EGT PROBE INSTALLATION” SECTION TO CONTINUE.

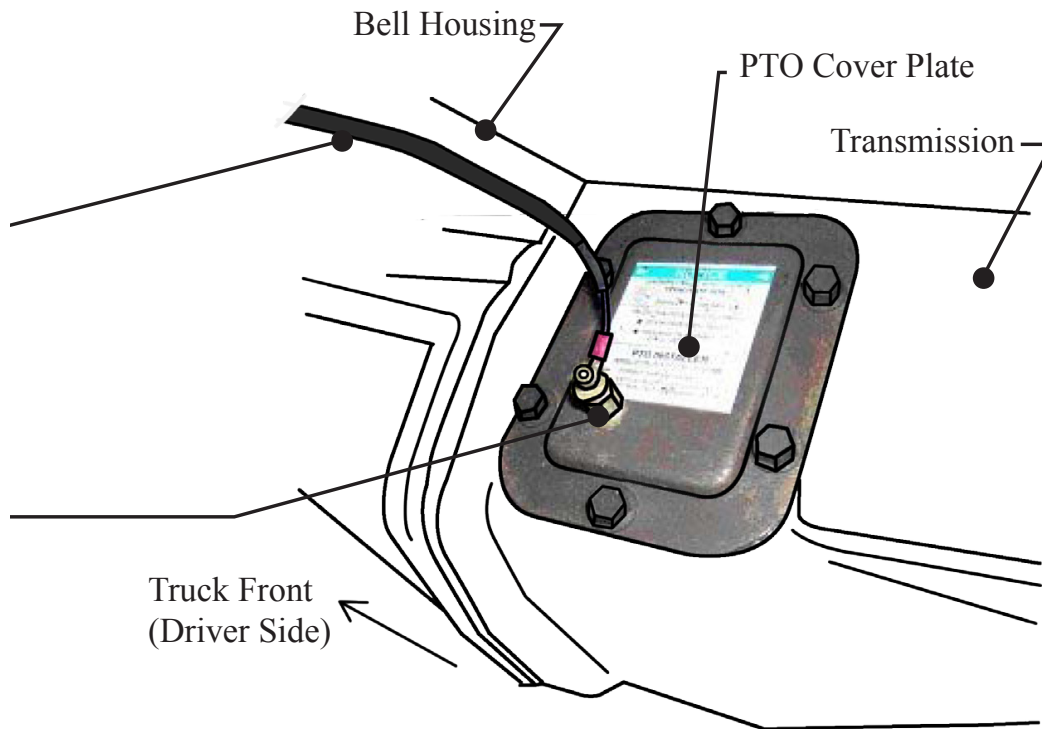

NOTE: When the Power Take-Off (PTO) plate is removed ALL of the gear lube from the transmission will drain out – Ensure that you have the CORRECT replacement oil prior to removing the PTO plate. See the Dodge service manual for replacement gear lube type.

1. Using a 14 mm wrench, remove the lowest bolt on the PTO cover plate and drain the transmission fluid.
2. Unbolt the remaining five bolts to the PTO cover plate and remove it completely.
3. Using a 5/16" or 21/64" drill bit, drill a hole in the PTO cover plate in the location shown above.
4. Using a 1/8" NPT tap, thread the hole in the PTO cover plate.
5. Apply Teflon tape or pipe thread sealant to the sensor threads and screw it into the PTO cover plate.
6. Clean the surface of the PTO cover plate and transmission . The plate will need to be resealed. Apply an automotive gasket silicone to the clean plate and install.
7. Connect the edge cable to the sensor using the supplied hardware.
8. Refill the transmission with fluid according to OEM specifications.


2003 to 2004 5.9L (CR) - Supplied Items List

Note: Depending on your year of truck, you may not need everything provided.


① Quick Install Guide - 1 each



⑤ Zip Ties - 10 Each



② EGT Probe - 1 Each

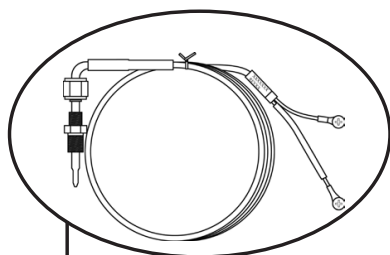


→ EGT Probe Location

Battery


Exhaust Manifold

③ Brass Elbow - 1 Each




Turbo


④ Hose Clamp - 1 each

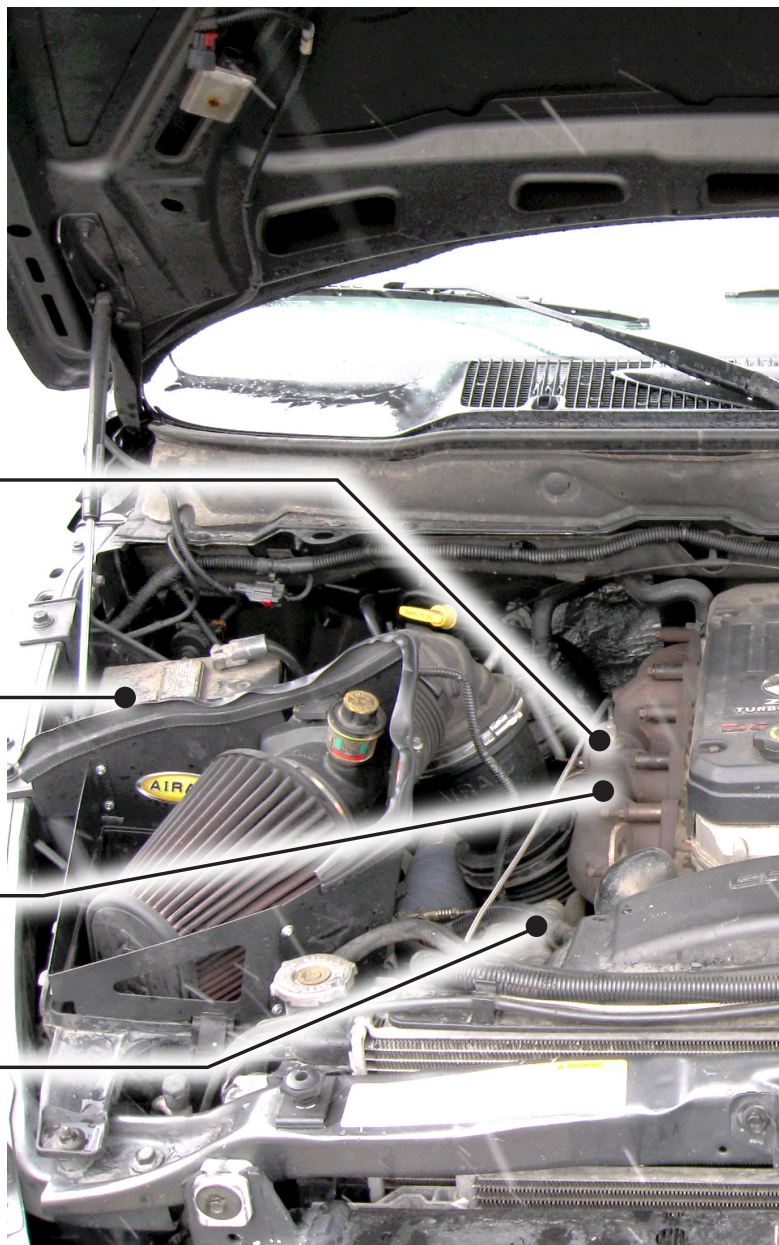


⑥ Juice Harness - 1 Each

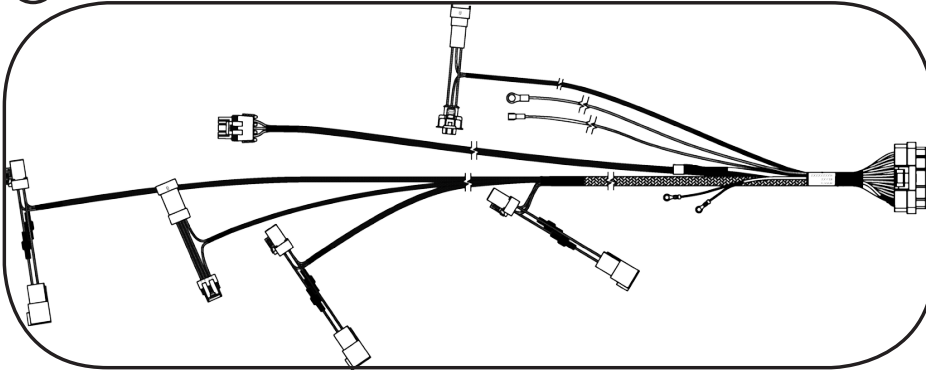

⑦ Juice Module 1 Each



⑧ Velcro Strips 2 each

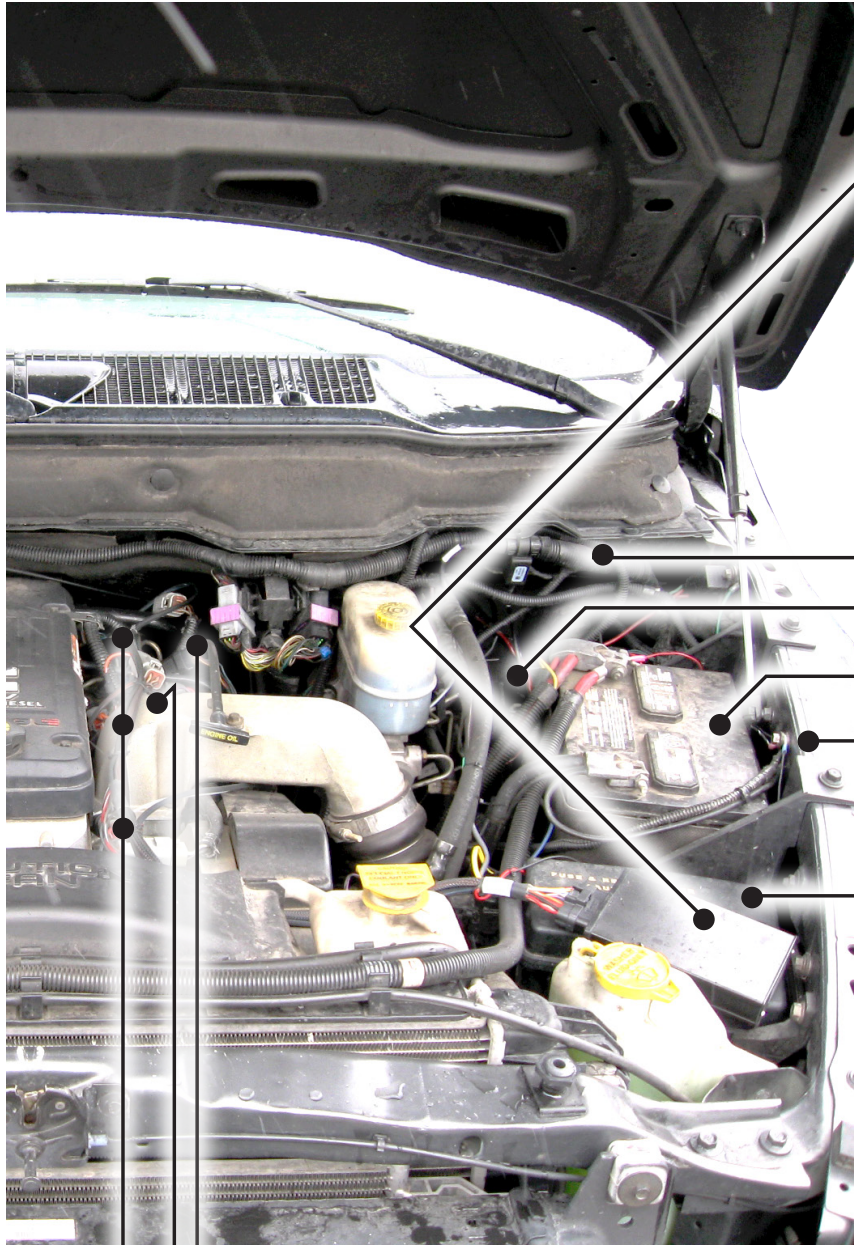

EAS Install Location

Fire wall Grommets

Battery

Ground Connector Location

Fuse Box

⑨ Fuse Link 1 each




MAP Sensor

Fuel Pressure Sensor


Injectors

2003 to 2004 5.9L (CR) - Harness Overview

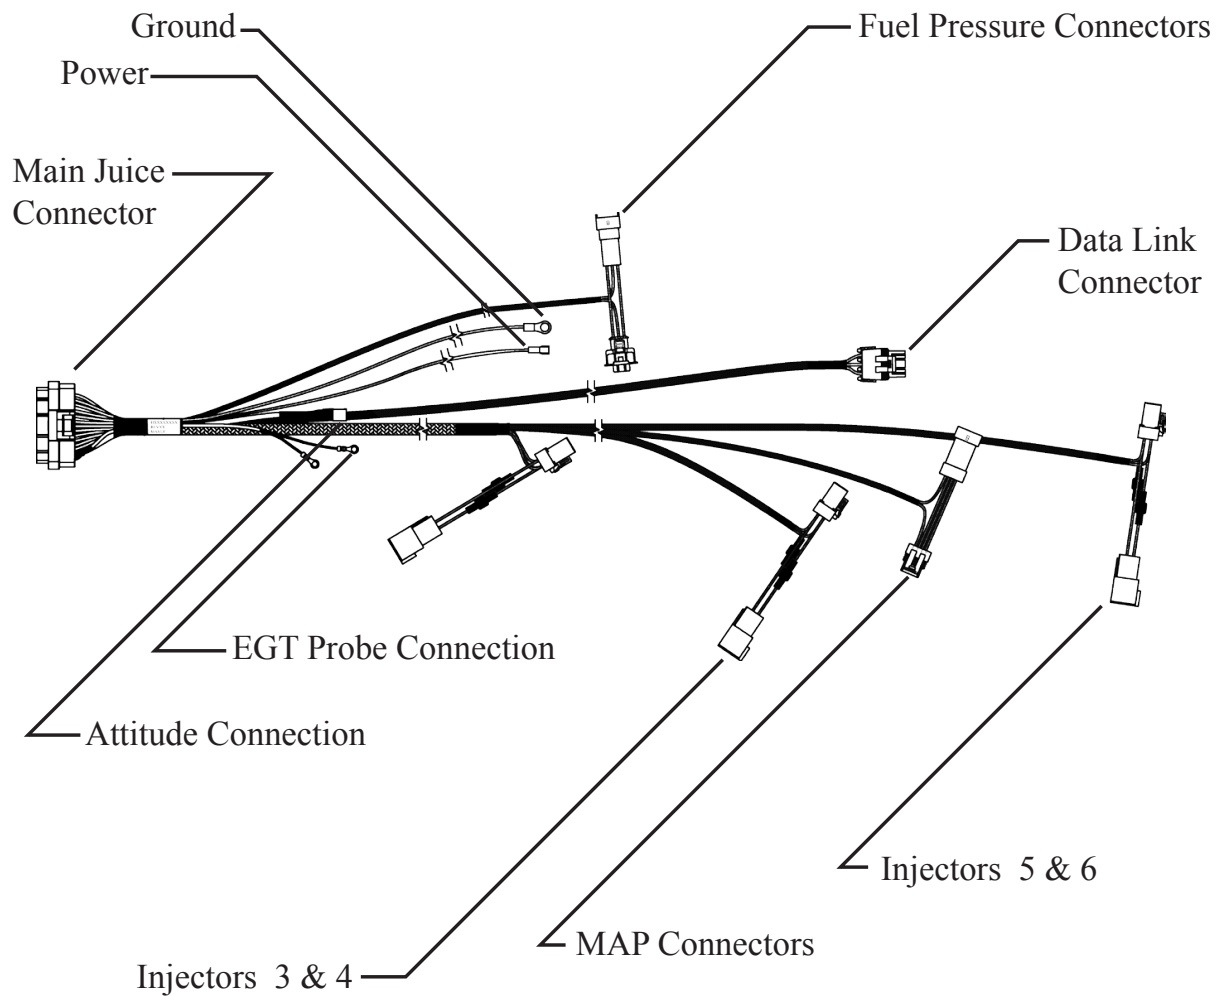

2003-2004 5.9L (CR) - Required Tools

- 3/8" Drive Ratchet
- 10mm Socket
- 5/16" Socket
- 1/2" Wrench
- 7/16" Wrench

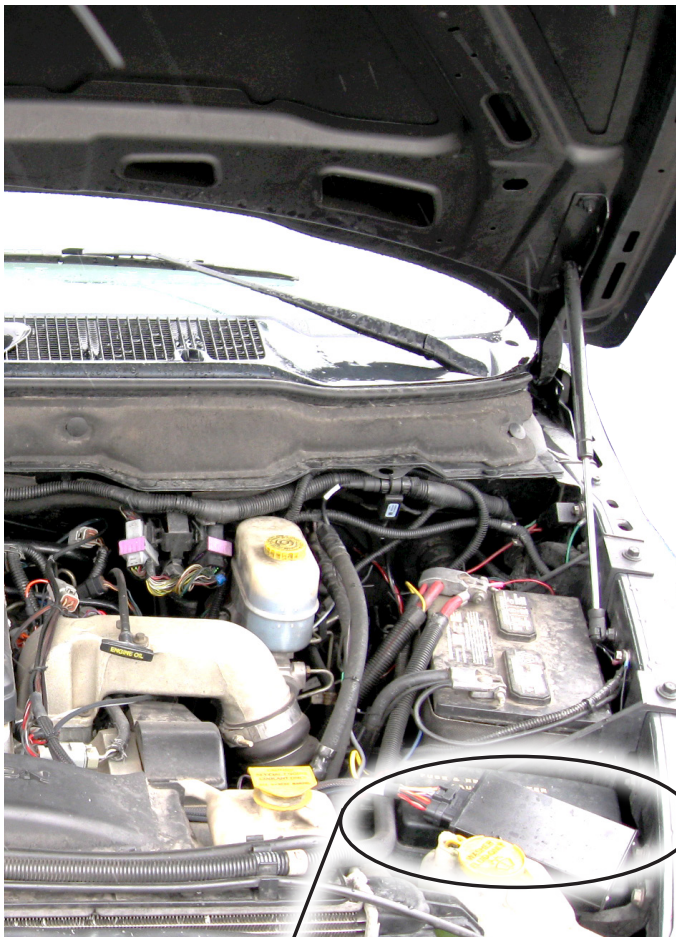


1. Using the 1/2" wrench, loosen both negative battery cables.


2. Remove cables from the battery posts and set aside. **NOTE: DO NOT reconnect until installation is complete. Connecting power may cause fault code in the ECM.**

3. Locate and remove Fuse 50 (10 Amp) from inside the engine compartment fuse panel.

4. Insert the Leaded Fuse Link. The leg with the wire soldered to it needs to plug into the "HOT" side of the fuse location. Orient the fuse exactly as shown below.

5. From the main harness, connect the Red Power Connector to the installed Fuse Link.

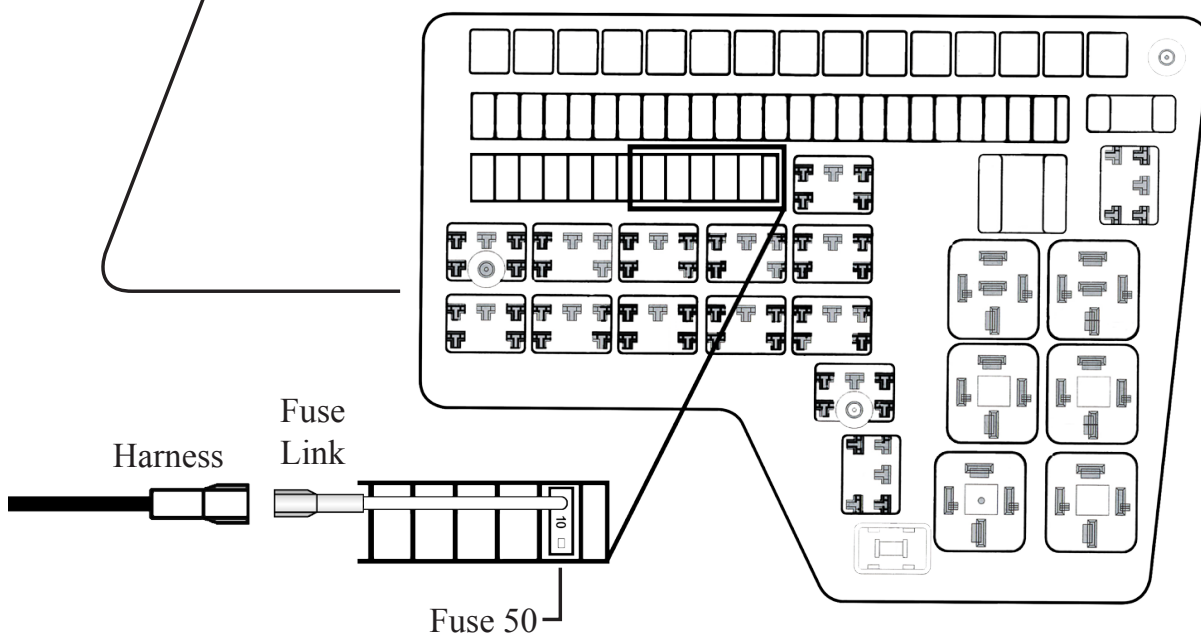

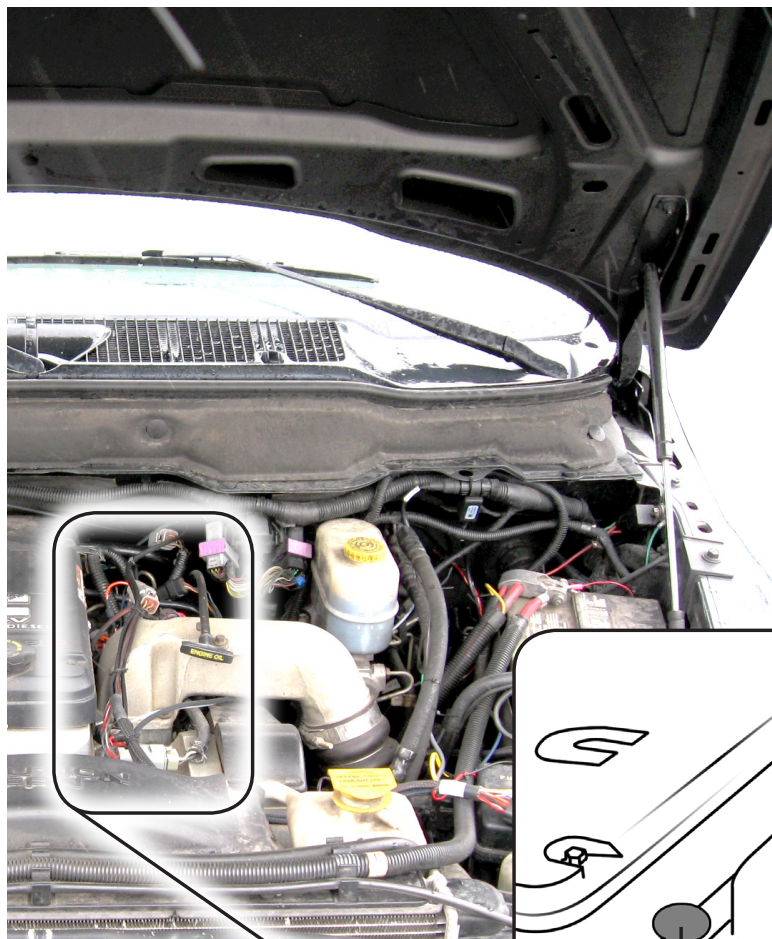

CAUTION: Do not force the connection. If the connectors do not easily go together, inspect the pins, and retry installation.

1. Disconnect all 3 stock injector connectors by squeezing the tab on the top of each connector.


Injectors 5-6
(Green & Blue)

Injectors 1-2
(Red & Brown)

Injectors 3-4
(Orange & Tan)

2. Insert the Edge Injector Connectors between the stock connectors, and lock in place.


NOTE: Match Edge Harness connectors to the proper injector set according to the wire colors described above.

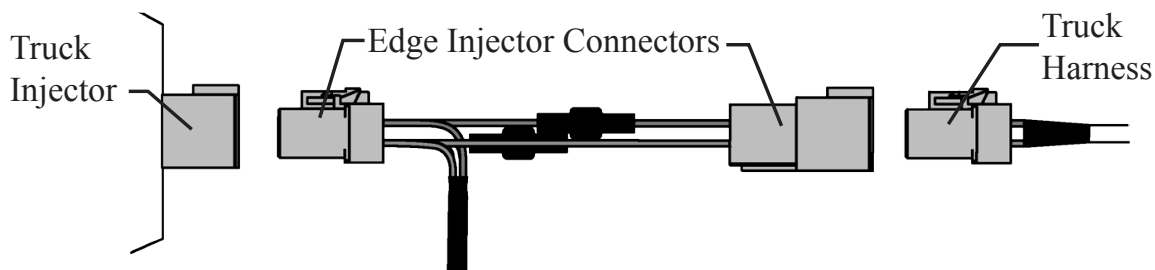

2003 to 2004 5.9L (CR) - MAP Sensor Connection

1. Locate the MAP connector.


2. Remove the vehicle MAP sensor connector and connect the Edge Harness MAP connectors in between the vehicle harness and the sensor itself.

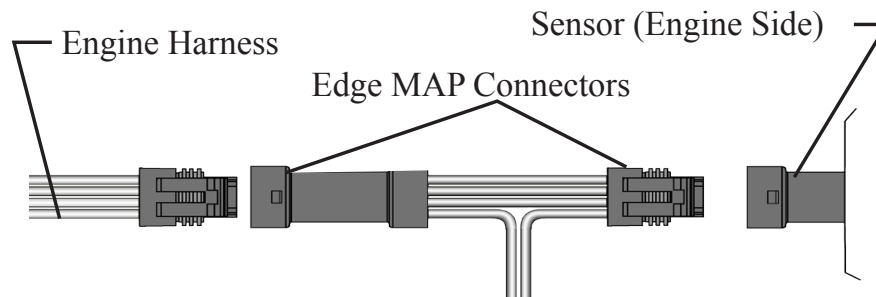

2003 to 2004 5.9L (CR) - Fuel Pressure Sensor

1. Locate the Fuel Pressure sensor connector.


2. Remove vehicle Fuel Pressure Sensor connector and connect the Edge Harness Fuel pressure sensor connector "T" in between the vehicle harness and the sensor itself.

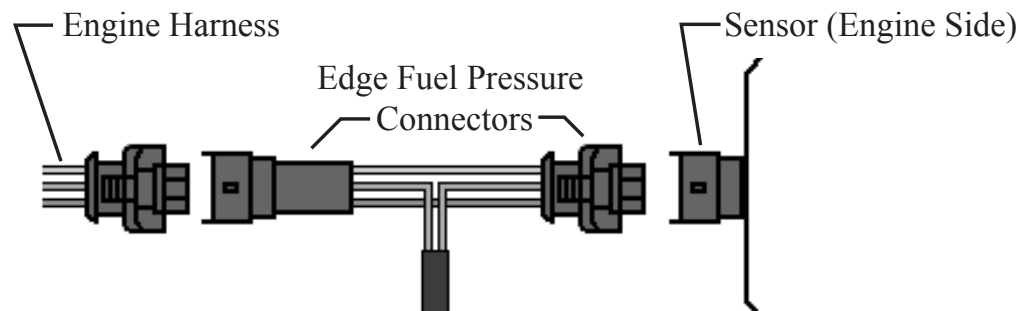

2003 to 2004 5.9L (CR) - Data Link Connection

1. Locate the vehicle Data Link connector. (Towards bottom of Engine)


2. Unplug the existing Data Link connector and re-connect using the Edge Harness Data Link connector. **NOTE: The data link may come from the factory with a dummy plug in it. If so, remove the dummy plug, and connect the Edge data link connector into the socket. Save the dummy plug for use if the Juice must be removed for vehicle service.**

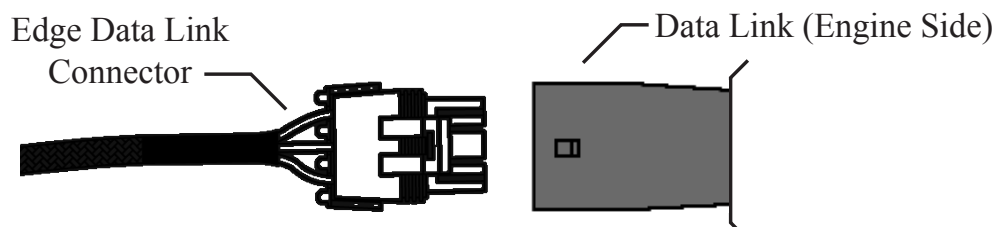

NOTE: On some vehicles, there is a solid line and cannot be replaced with a brass elbow.

1. Using the 5/16" socket, loosen the two clamps securing the air induction hose to the air filter housing and the turbo inlet.

2. Remove the hose and set it aside.

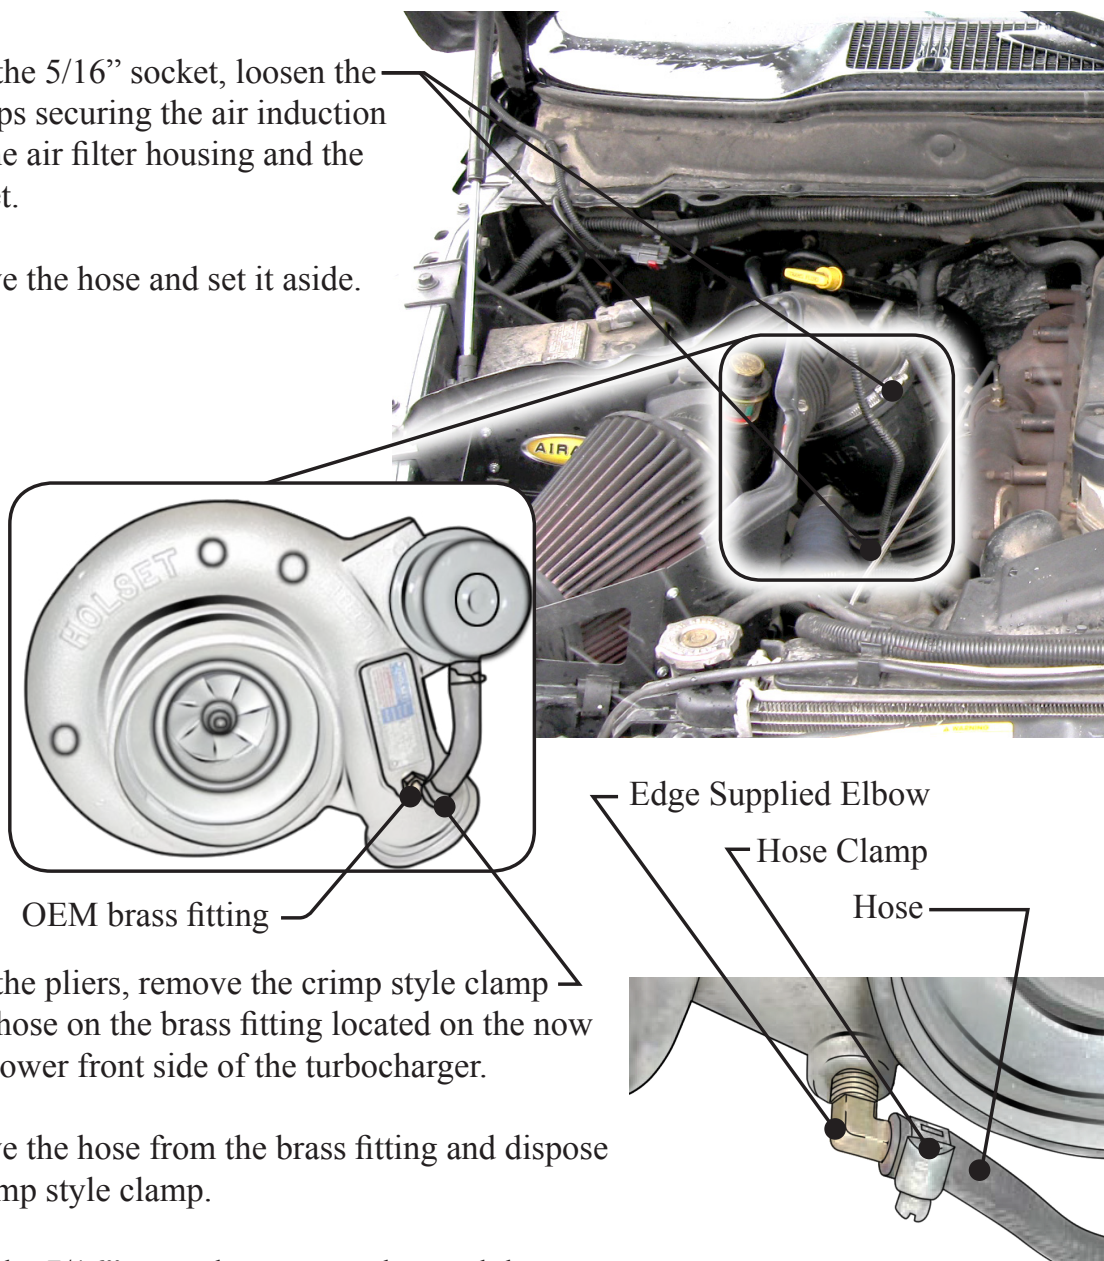

OEM brass fitting

3. Using the pliers, remove the crimp style clamp from the hose on the brass fitting located on the now exposed lower front side of the turbocharger.

4. Remove the hose from the brass fitting and dispose of the crimp style clamp.

5. Using the 7/16" wrench, unscrew the stock brass fitting.

6. Install the supplied brass fitting. Tighten while being careful not to over-tighten.



7. Slip the supplied hose clamp onto the stock hose then the stock hose onto the new brass fitting. Tighten the hose clamp with the 1/4" socket.

8. Re-connect the air induction hose to the air filter housing and turbocharger inlet.

9. Using the 5/16" socket, tighten both clamps securely.

2003 to 2004 5.9L (CR) - Ground Connection

1. Remove the 10mm bolt from the driver side fender. (above the battery)

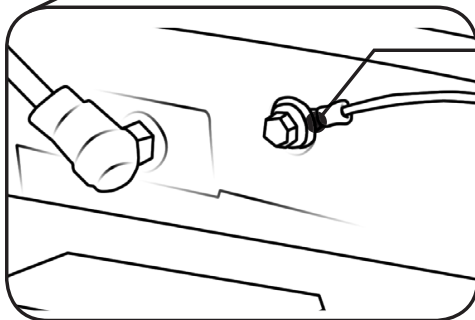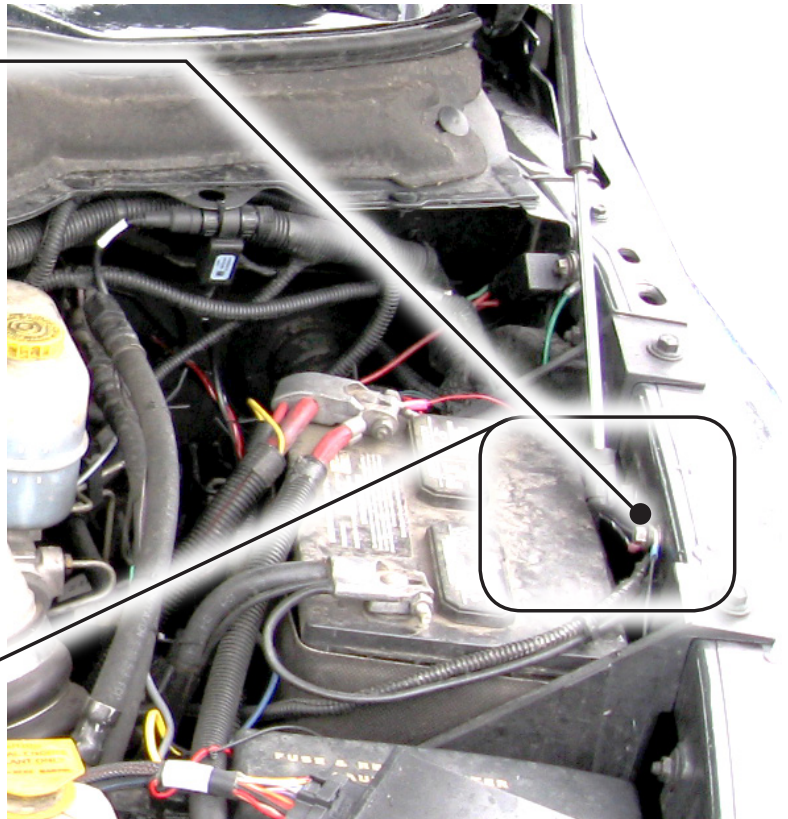

2. Add the black ground connector with the round terminal to the wire bundle already being fastened by the bolt.

3. Tighten the bolt.

NOTE: YOUR JUICE MODULE INSTALLATION IS NOT COMPLETE. REFER TO THE "EGT PROBE INSTALLATION" SECTION TO CONTINUE.


2004-5 to 2005 5.9L (600) - Supplied Items List

Note: Depending on your year of truck, you may not need everything provided.


① Quick Install Guide - 1 each



③ Zip Ties - 10 Each




② EGT Probe - 1 Each

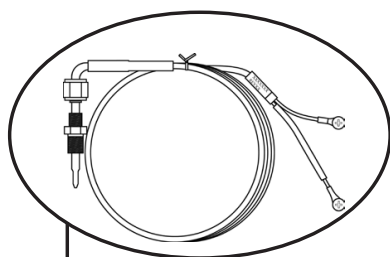


→EGT Probe Location

Battery



Exhaust Manifold

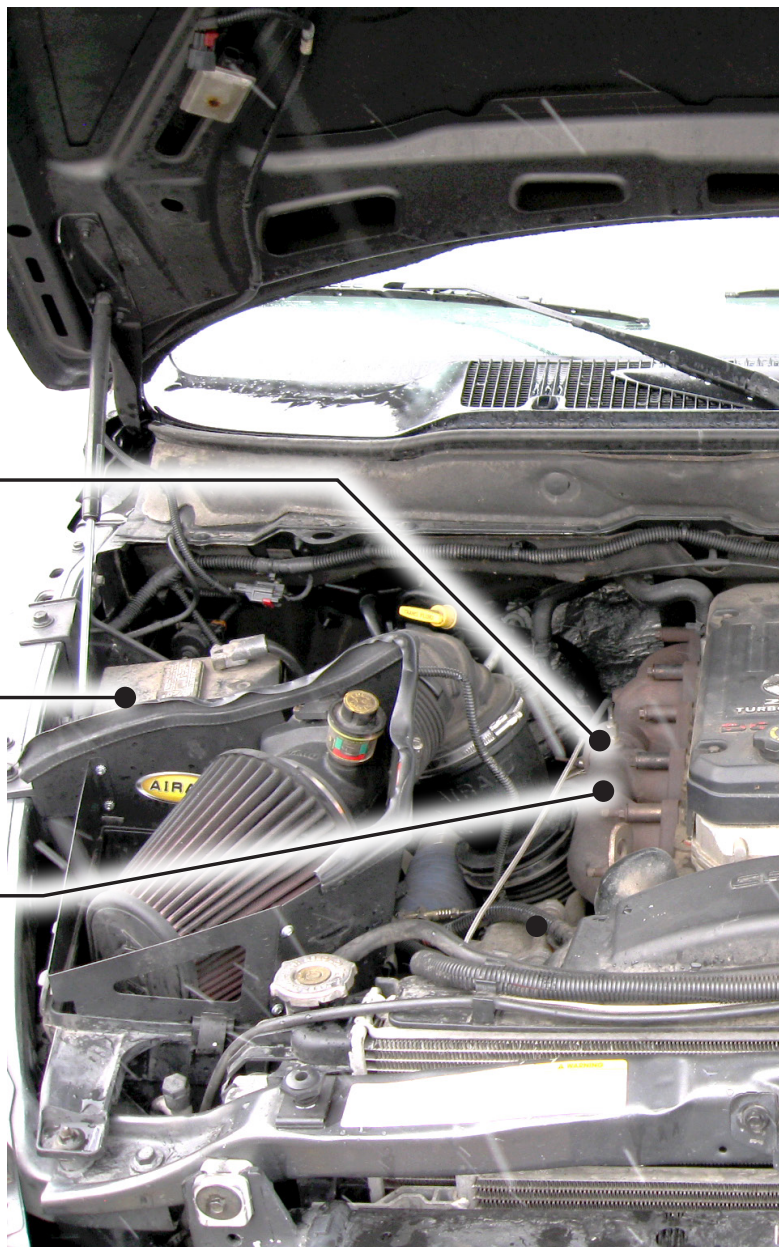


④ Juice Harness - 1 Each

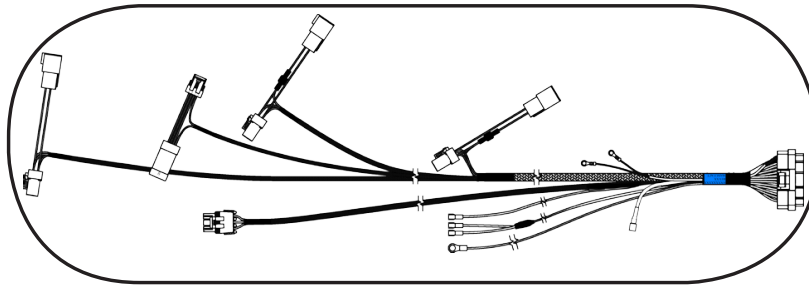

⑤ Juice Module 1 Each

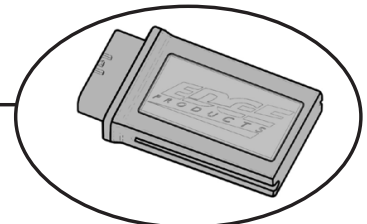

⑥ Velcro Strips 2 each

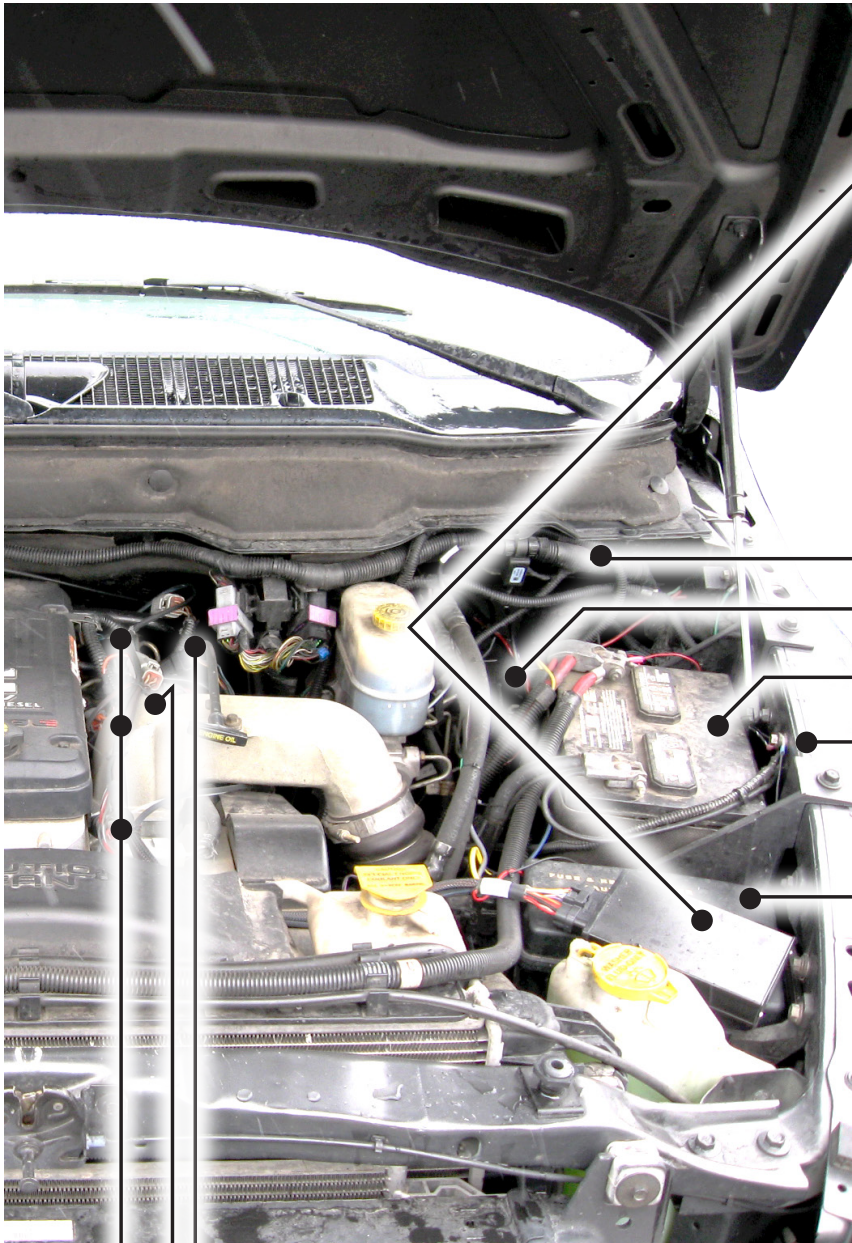

EAS Install Location


Fire wall Grommets

Battery

Ground Connector Location

Fuse Box

⑦ Fuse Link 3 each

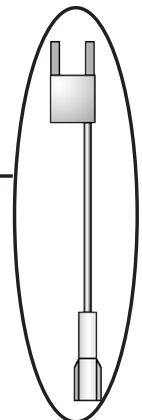


MAP Sensor

Fuel Pressure Sensor

Injectors

2004-5 to 2005 5.9L (600) - Harness Overview

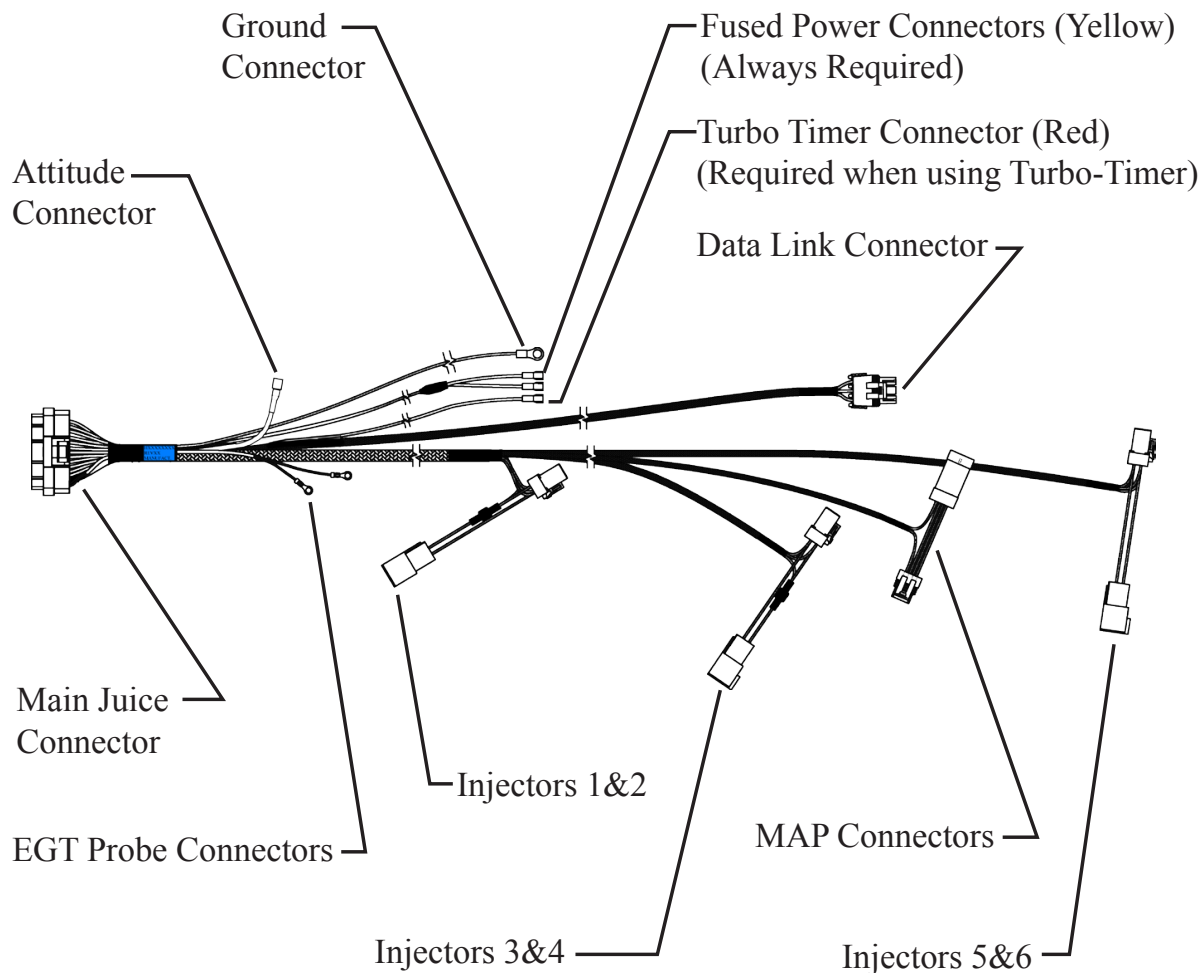

2004-5 to 2005 5.9L (600) - Required Tools

- 3/8" Drive Ratchet
- 10mm Socket
- 5/16" Socket
- 1/2" Wrench
- 7/16" Wrench


2004-5 to 2005 5.9L (600) - Turbo Timer (Optional)


1. Locate and remove Fuse 16 (10 Amp) from inside the engine compartment fuse panel.
2. Insert the Leaded Fuse Link (see Figure 2). The leg with the wire soldered to it needs to plug into the "HOT" side of the fuse location. Orient the fuse exactly as shown.
3. From the main harness, connect the Red Turbo Timer Connector to the installed Fuse Link.



1. Using the ½" wrench, loosen both negative battery cables.
2. Remove cables from the battery posts and set aside. **NOTE: DO NOT reconnect until installation is complete. Connecting power may cause fault code in the ECM.**
3. Locate and remove Fuses 28 and 35 (10 Amp) from inside the engine compartment fuse panel.
4. Insert the Leaded Fuse Link. The leg with the wire soldered to it needs to plug into the "HOT" side of the fuse location. Orient the fuse as shown below.
5. From the main harness, connect the yellow Power Connectors to the installed Fuse Links.

NOTE: DO NOT reconnect battery until installation is complete. Connecting power may cause fault code in the ECM.

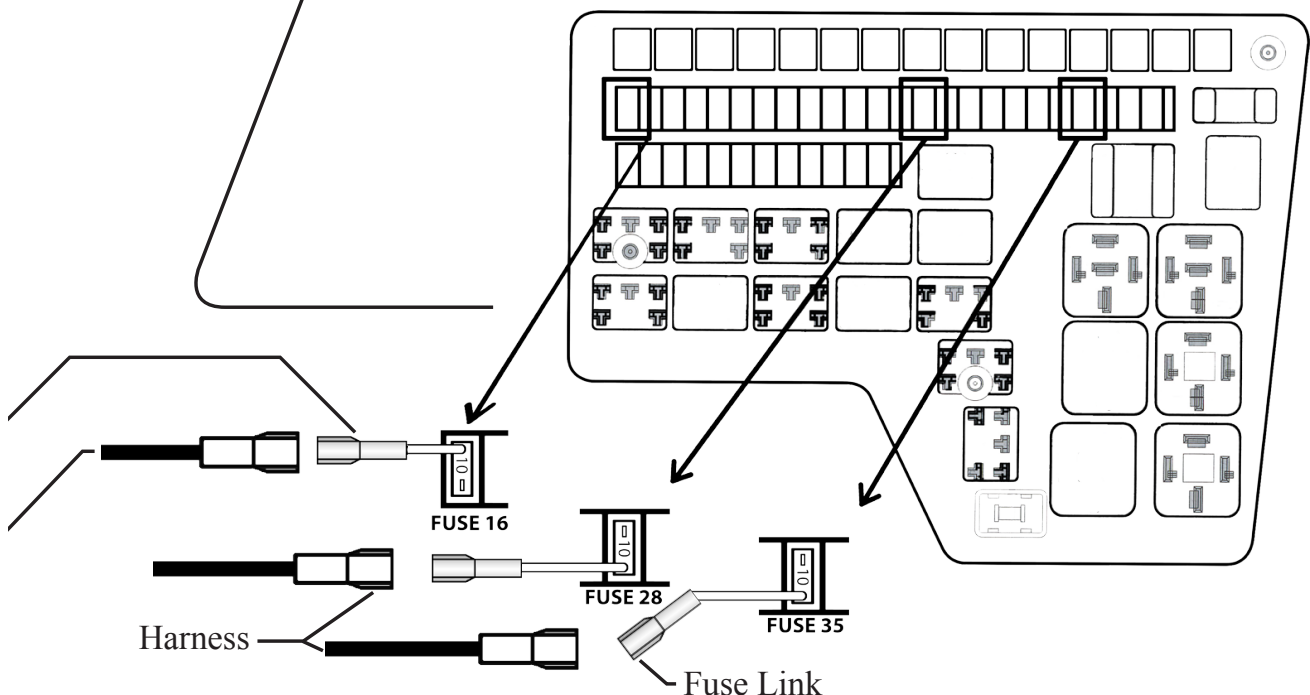

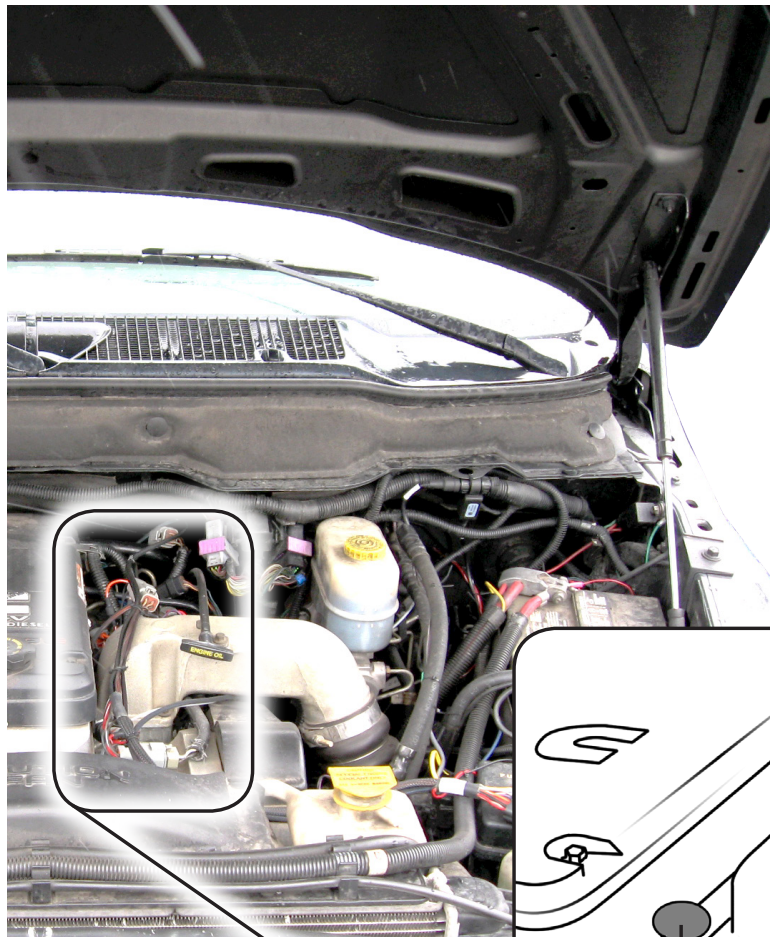

CAUTION: Do not force the connection. If the connectors do not easily go together, inspect the pins, and retry installation.

1. Disconnect all 3 stock injector connectors by squeezing the tab on the top of each connector.


Injectors 5-6
(Green & Blue)

Injectors 1-2
(Red & Brown)

Injectors 3-4
(Orange & Tan)

2. Insert the Edge Injector Connectors between the stock connectors, and lock in place.


NOTE: Match Edge Harness connectors to the proper injector set according to the wire colors described above.

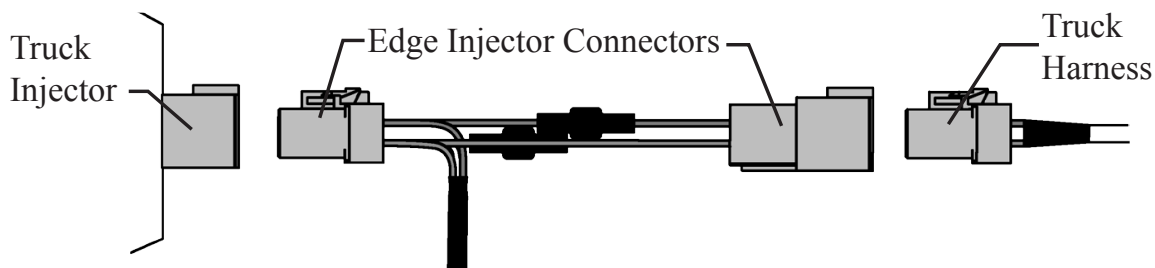

2004-5 to 2005 5.9L (600) - MAP Sensor Connection

1. Locate the MAP connector.


2. Remove the vehicle MAP sensor connector and connect the Edge Harness MAP connectors in between the vehicle harness and the sensor itself.

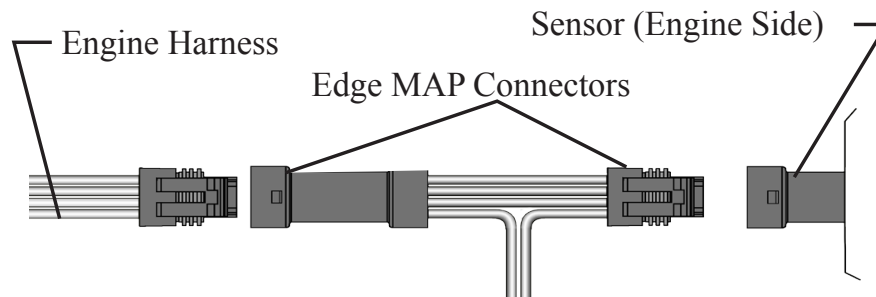

2004-5 to 2005 5.9L (600) - Data Link Connection



1. Locate the vehicle Data Link connector. (Towards bottom of Engine)

2. Unplug the existing Data Link connector and re-connect using the Edge Harness Data Link connector. **NOTE: The data link may come from the factory with a dummy plug in it. If so, remove the dummy plug, and connect the Edge data link connector into the socket. Save the dummy plug for use if the Juice must be removed for vehicle service.**

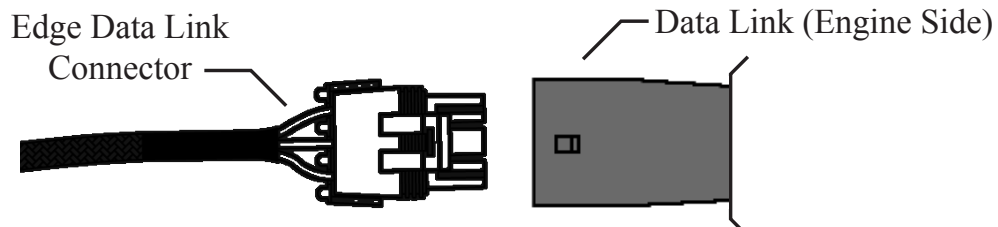

2003 to 2004 5.9L (CR) - Ground Connection

1. Remove the 10mm bolt from the driver side fender. (above the battery)

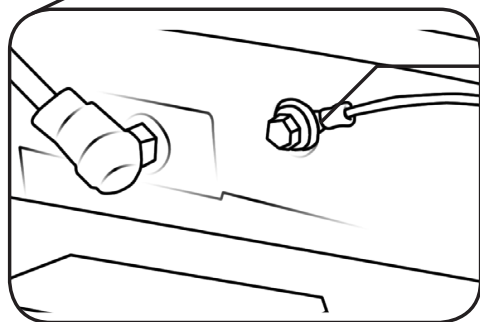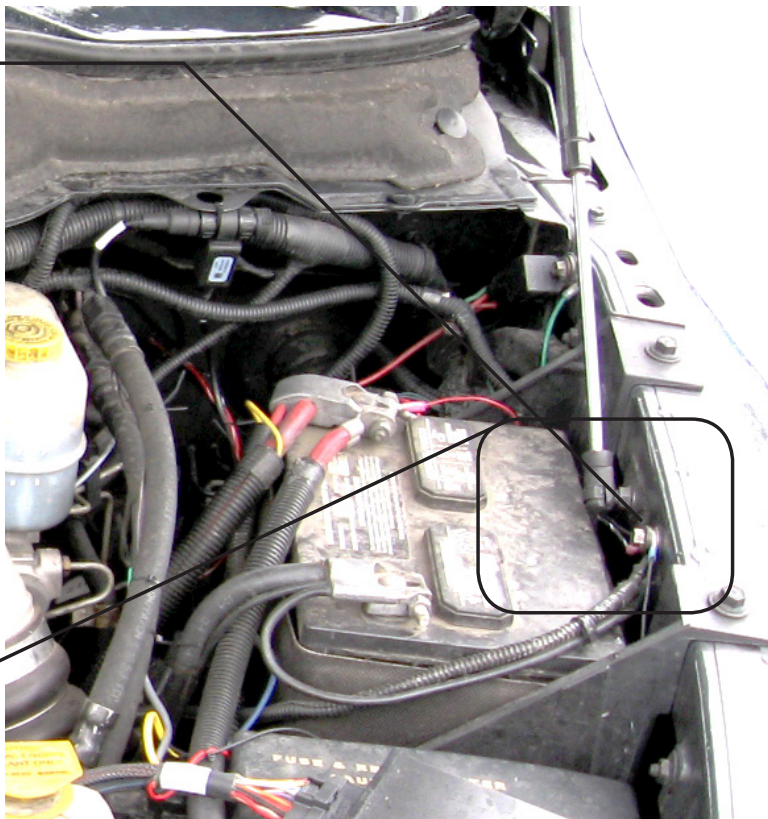

2. Add the black ground connector with the round terminal to the wire bundle already being fastened by the bolt.

3. Tighten the bolt.

NOTE: YOUR JUICE MODULE INSTALLATION IS NOT COMPLETE. REFER TO THE “EGT PROBE INSTALLATION” SECTION TO CONTINUE.

PAGE INTENTIONALLY LEFT BLANK


2006 to 2014 5.9L & 6.7L - Supplied Items List

Note: Depending on your year of truck, you may not need everything provided.


① Quick Install Guide - 1 each



③ Zip Ties - 10 Each

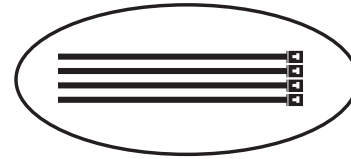


② EGT Probe - 1 Each

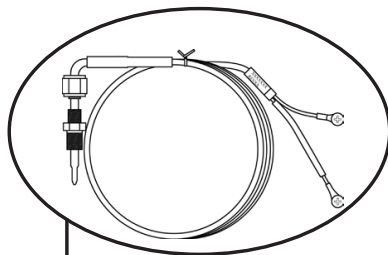


Exhaust Manifold

Battery


Turbo

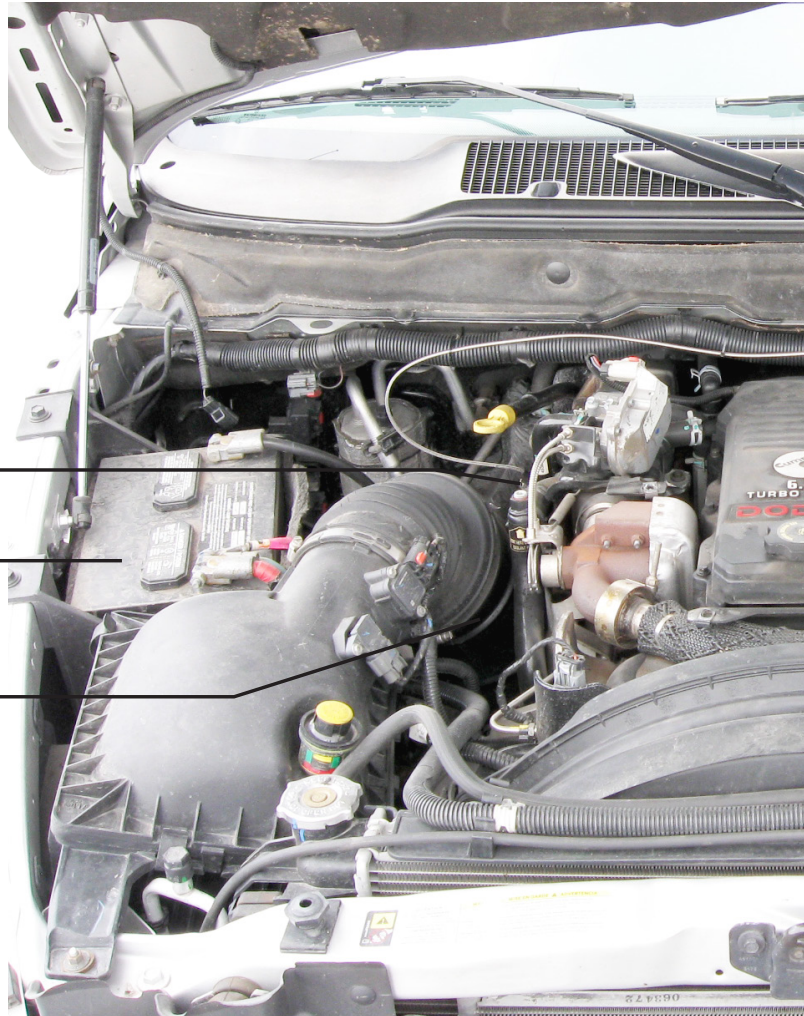



⑨ DATA/OBDII Cable 1 each



④ Juice Harness - 1 Each

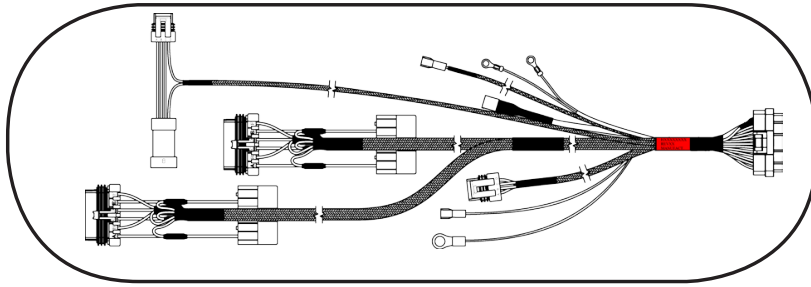

⑤ Juice Module 1 Each

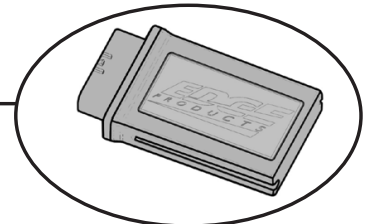

⑥ Velcro Strips 2 each



EAS Install Location


Battery

Ground Connector

Fire wall Grommets


Fuse Box

⑦ Fuse Link 3 each

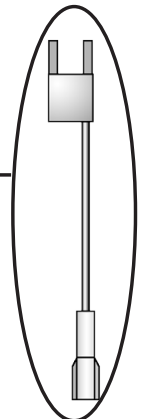


⑧ Turbo Timer Adapters 1 each

2006-2009



Or


2010-2012



Sensor Locations

Injector Locations

2006 to 2014 5.9L & 6.7L - Harness Overview

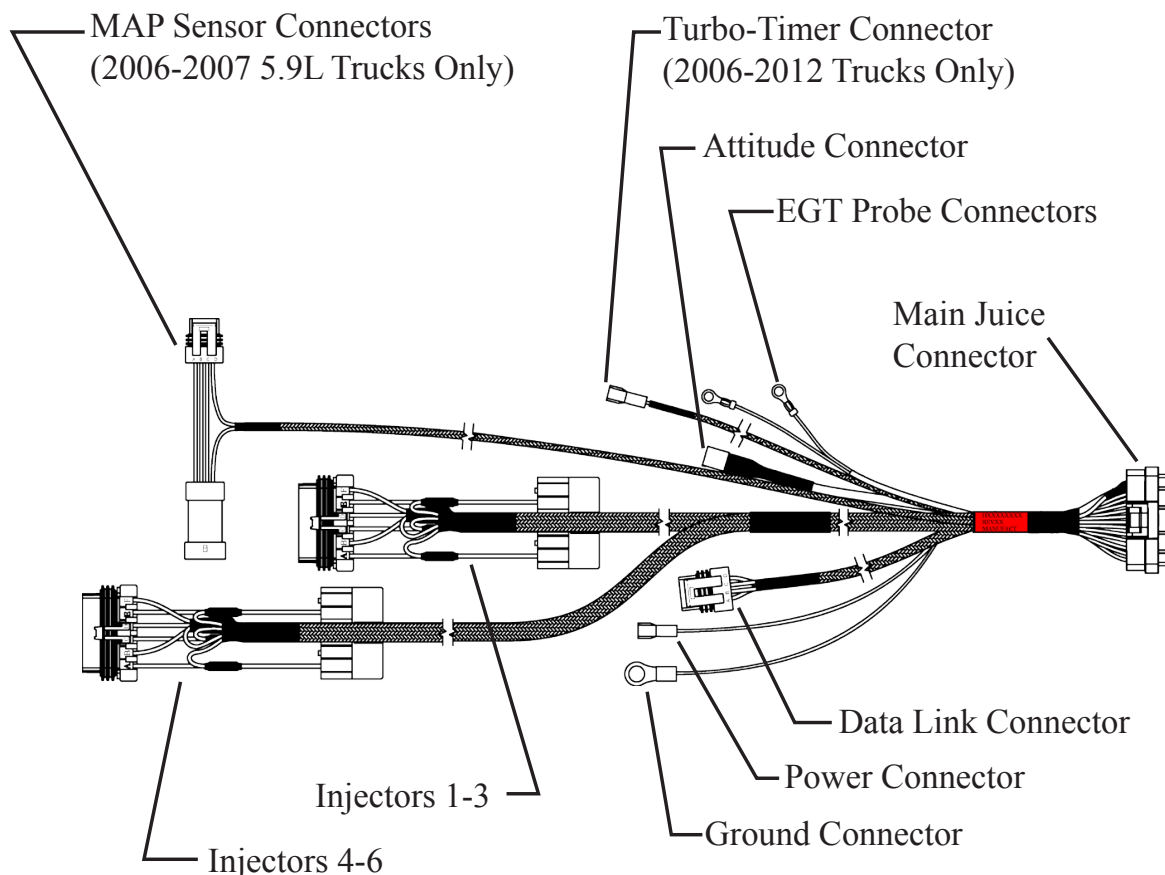


2006 to 2014 5.9L & 6.7L - Required Tools

- 3/8" Drive Ratchet
- 10mm Socket
- 1/2" Socket


2006 to 2014 5.9L & 6.7L - Power Connections

1. Using the 1/2" wrench, loosen both negative battery cables.
2. Remove cables from the battery posts and set aside.
NOTE: DO NOT reconnect until installation is complete. Connecting power may cause fault code in the ECM.
3. Locate and remove Fuses from inside the engine compartment fuse panel.
4. Insert the Leaded Fuse Link. The leg with the wire soldered to it needs to plug into the "HOT" side of the fuse location. Orient the fuse as shown.
5. From the main harness, connect the Red Power Connectors to the installed Fuse Links.

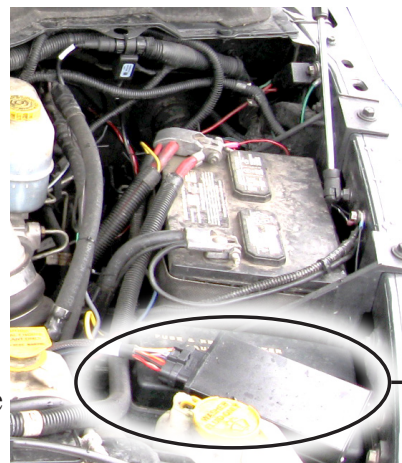


Harness   Fuse Link


2006-2009

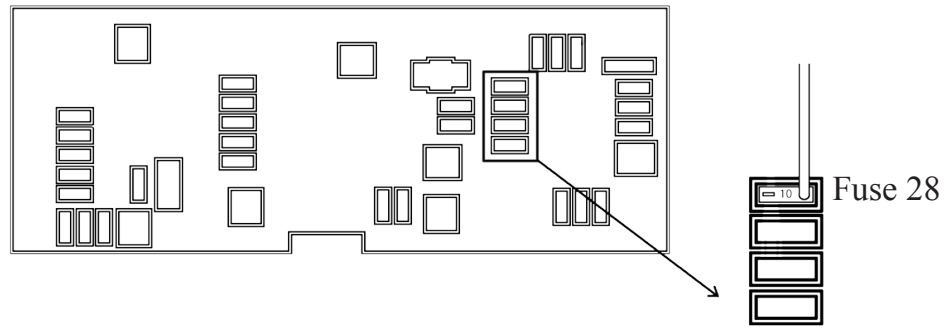

2010

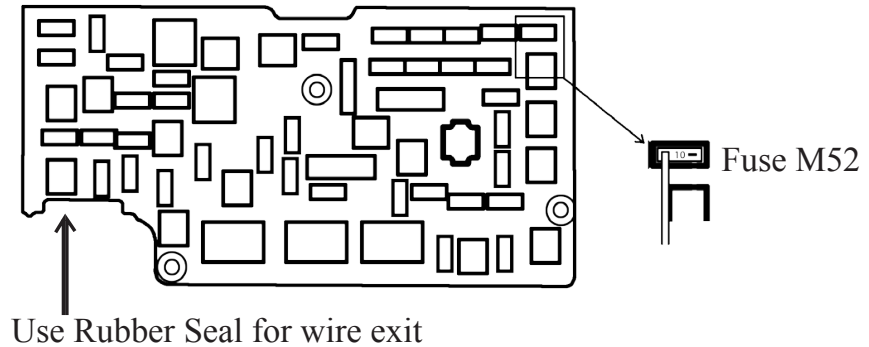


2011-2012

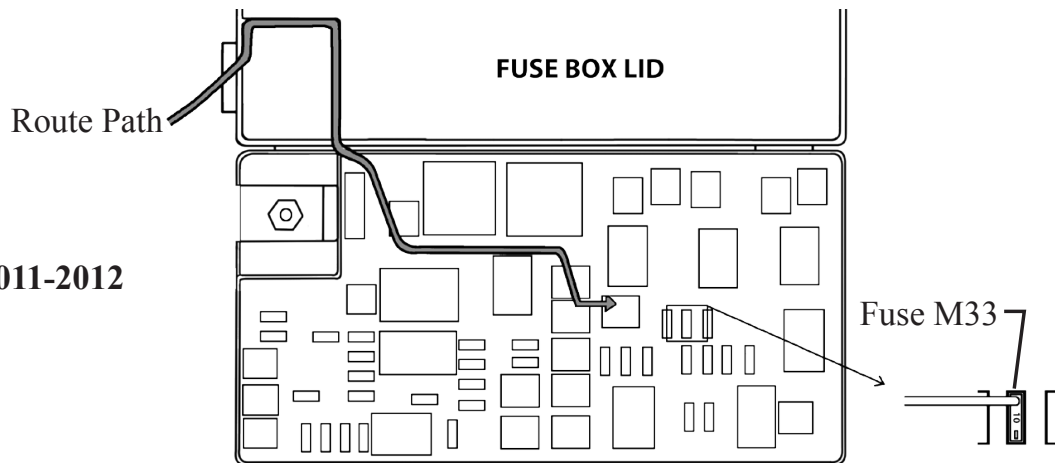


NOTE: For 2011-2012 trucks, route the wire along lid feature as shown. This will reduce the chance of the wire being crushed when the lid is closed.

2013-2014

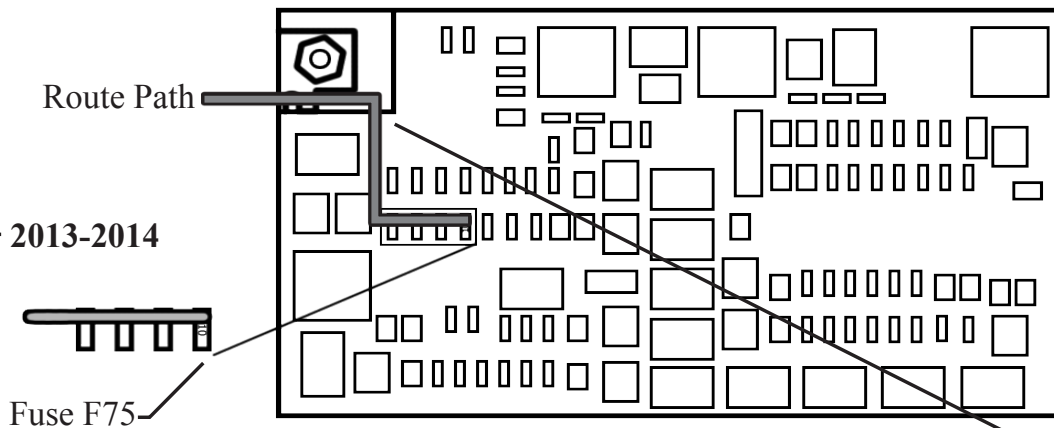

NOTE: Lightly trim the plastic to allow the wire to exit. When the lid is closed, the wire should not interfere.

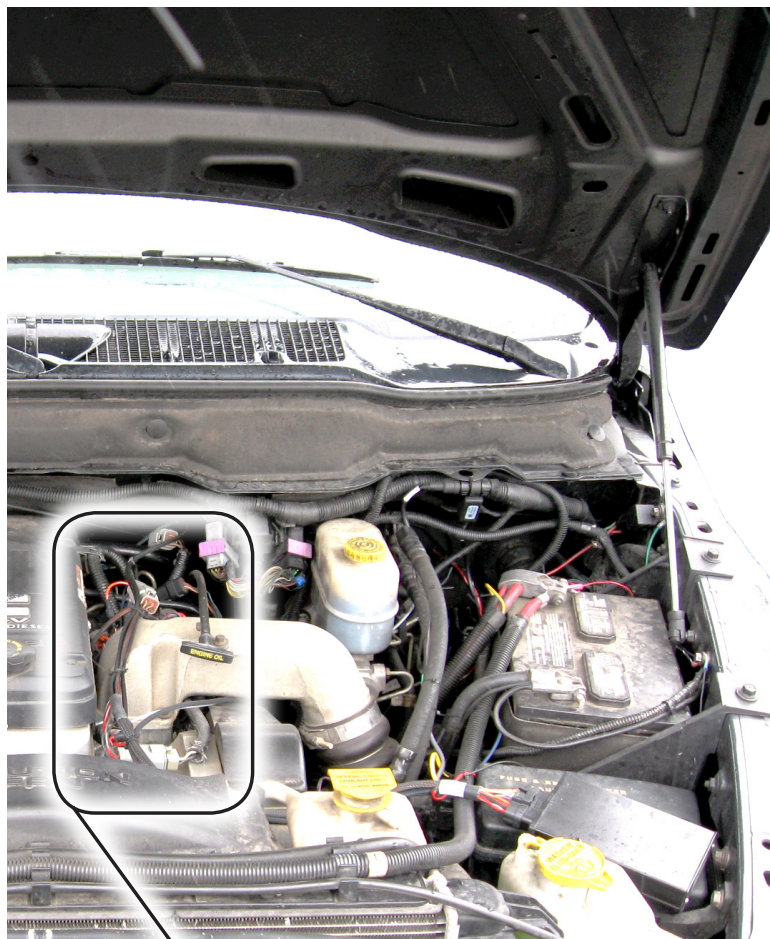

CAUTION: Do not force the connection. If the connectors do not easily go together, inspect the pins, and retry installation.


1. Locate the two stock injector connectors.

2. Remove vehicle Injector Connectors and connect the Edge Harness Injector connector "T" in between the vehicle harness and the sensor itself.



NOTE: Injector Connectors with injectors 1, 2, & 3 has Orange/White, Red/White and Brown/White wires and a shorter cable length. The connector for injectors 4, 5, & 6 has Blue/White, Green/White, and Tan/White wires and a longer cable length.

Injectors (1-3)
(Org/wht, red/wht, brn/wht)

Injectors (4-6)
(blu/wht, grn/wht, tan/wht)

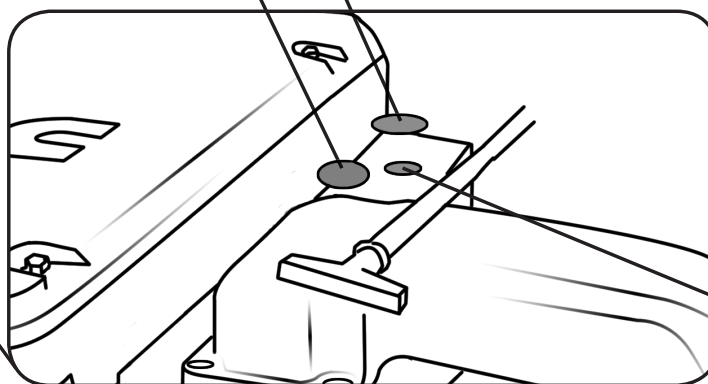

Injector
(Engine Side)

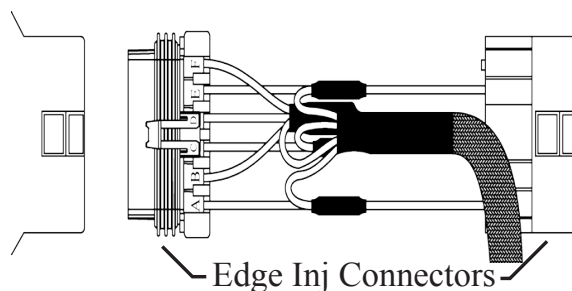


Engine
Harness

Edge Inj Connectors


2013 to 2014 6.7L - Injector Connection Tips

If you are having trouble getting to injectors 4-6, follow these instructions.

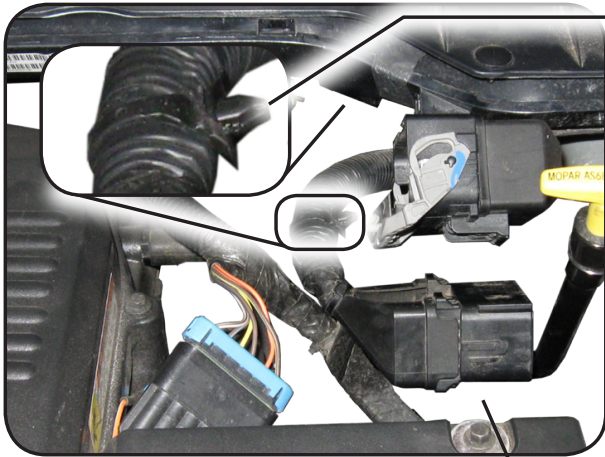

1. Pull the large engine harness away from the fire wall by carefully releasing the cable retention tab out of its mount.

2. Next, press in the connector lock using your right thumb, then disengage the lever by rotating it in the direction shown.

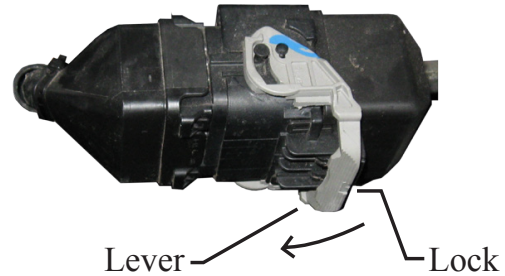

3. Remove the connector and set aside.



4. Lift the foam insulation in the direction shown to fully expose the injector connectors.


5. Unplug each injector set and install the edge harness according to the previous page.

6. Reconnect all connections, and continue the install by referring to the next section.

2006 to 2007 5.9L - MAP Sensor


1. Locate MAP connector.

2. Remove vehicle MAP sensor connector and connect the Edge Harness MAP connector "T" in between the vehicle harness and the sensor itself.

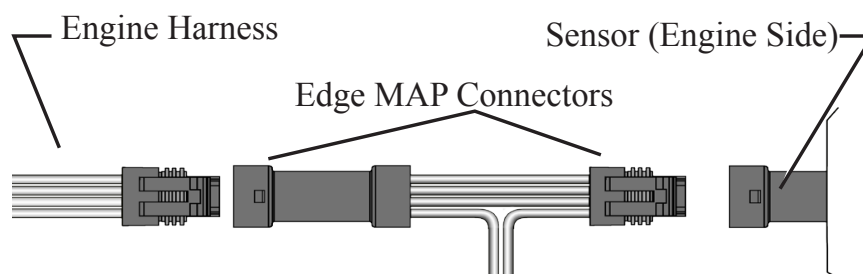


2006 to 2012 5.9L & 6.7L - Turbo Timer Connection

1. Locate the provided Turbo Timer cable. (not applicable to 2013-14 trucks)

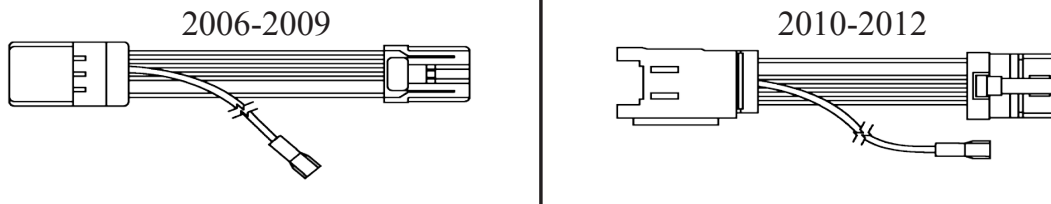


NOTE: There may be 2 different Turbo Timer adapters included in your kit. Once you have determined the connector is correctly installed, you may discard the remaining adapter as you will not need it.

2. Remove the panel under the steering column.
3. Locate the key position connectors. **The 2006-2009 are up and inside the steering column. The 2010-2012 are behind the key/ignition.**

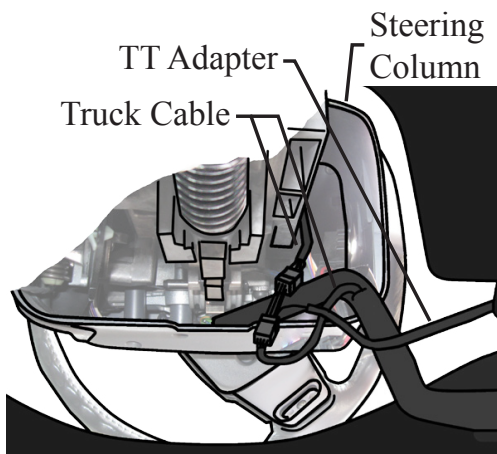


**Looking up from brake pedal
(2006-2009)**

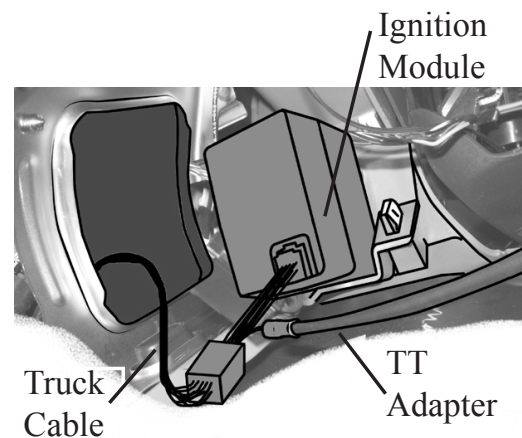


**Looking up from brake pedal
(2010-2012)**

4. Connect the Turbo Timer (TT) adapter in between the truck connectors.
5. Route the Turbo Timer (Main Harness) connector through the fire wall grommet.
6. Connect the Turbo Timer connector into the Turbo Timer adapter.


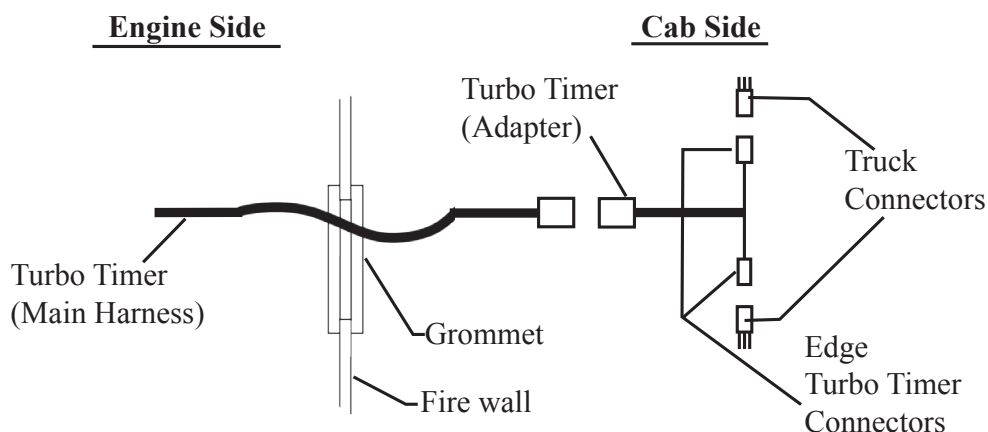


2006 to 2014 5.9L & 6.7L - Data Link Connection

1. Locate the supplied "DATA/OBDII" cable.
2. Locate the vehicle's OBDII port. This connector is located below the steering wheel under the dash.


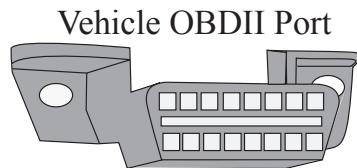


3. Plug the OBDII connector into the OBDII port.
 4. Route the Data Link Connector out the rubber grommet and plug it into the Data Link connector located on the Main Edge Harness.
- NOTE: The Attitude cable will later be routed and installed.**

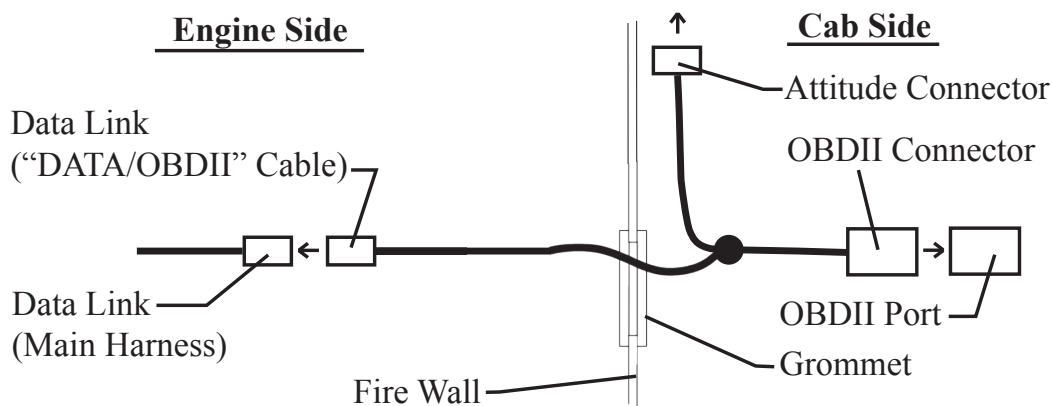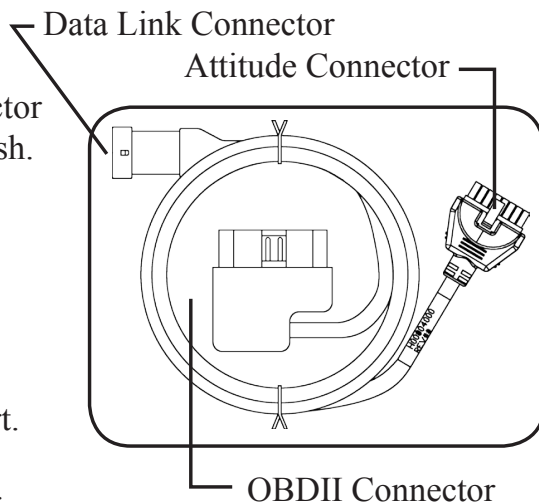

2006 to 2004 5.9L & 6.7L - Ground Connection

1. Remove the 10mm bolt from the driver side fender. (above the battery)
2. Add the black ground connector with the round terminal to the wire bundle already being fastened by the bolt.
3. Tighten the bolt.

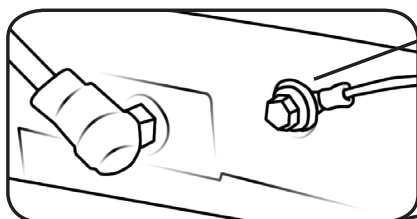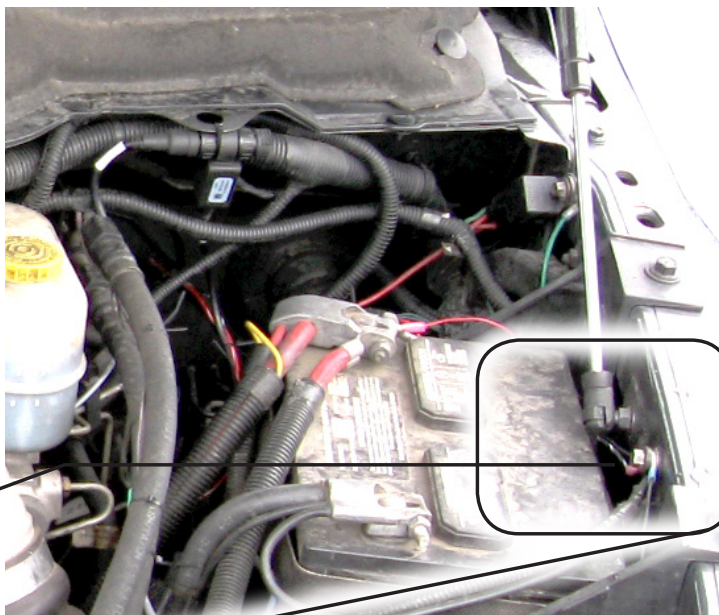

1998.5 to 2014 EGT Probe Install - Required Tools




WARNING When installing the EGT Thermocouple, wear eye protection and protective clothing to protect from getting metal chips in your eyes. Also, since exhaust manifolds can be very hot, allow the engine to cool before drilling. When working under the vehicle, make sure the park brake is set.

- Drill
- 21/64" (best size) or 5/16" drill bit
- 5/8" open end wrench
- Phillips screwdriver
- 1/8" drill bit or similar size (for pilot hole)
- 9/16" wrench or socket
- 1/8"-27 NPT Thread Tap
- 5/16" or 8mm wrench

1998.5 to 2014 EGT Probe Install - Supplied Items


EGT PROBE - 1 each

Shrink Tube - 2 each




1998.5 to 2007 EGT Probe Install - Locations

NOTE: All 3 views are looking from the passenger side.

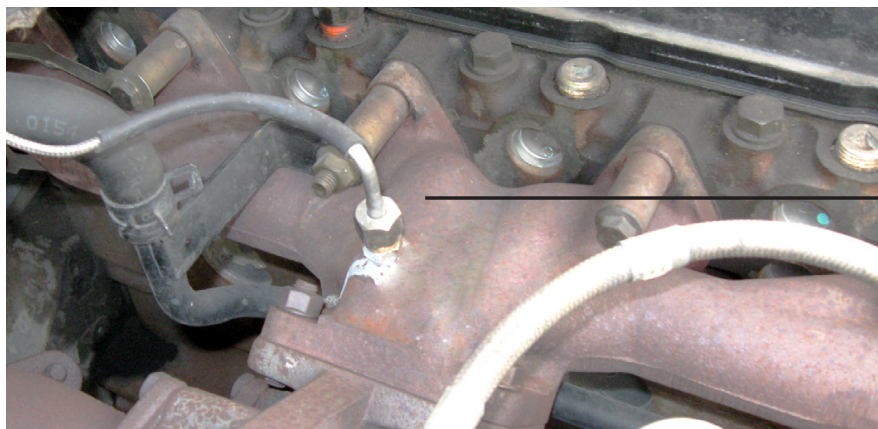


1998.5 - 2002

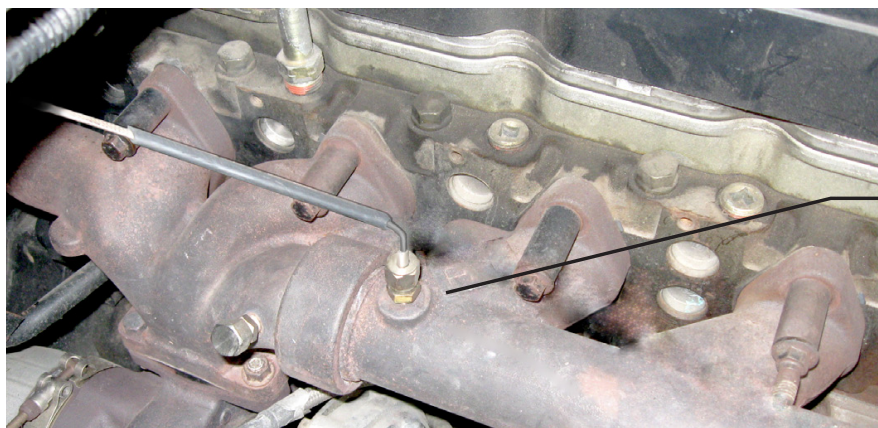


2003-2007

2007.5 to 2014 EGT Probe Install - Locations

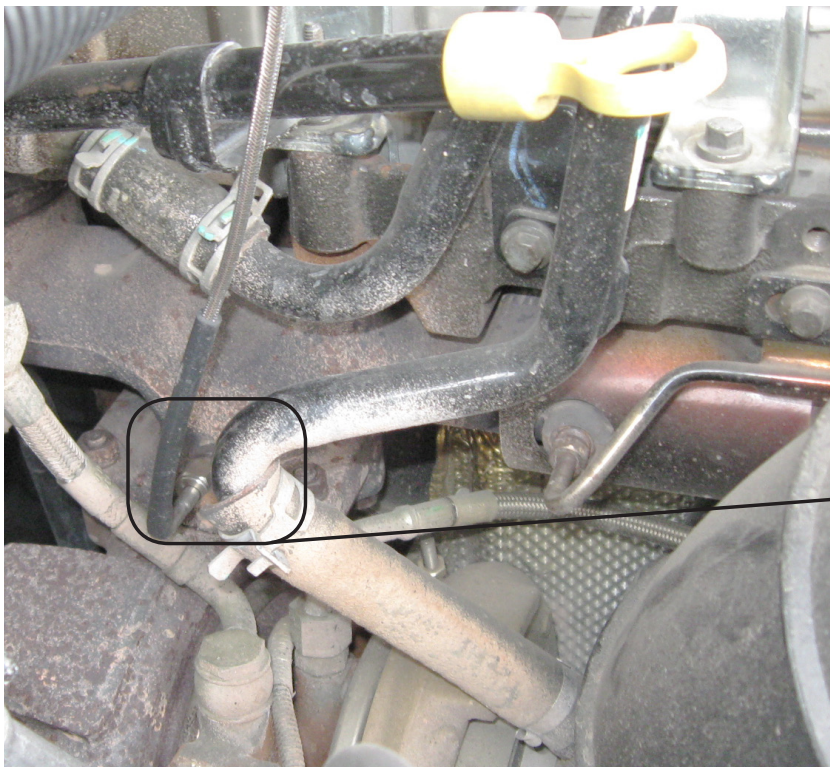

2007.5-2014




NOTE: Drill the hole to the right of the dashed line shown. The dash depicts an internal wall feature that should be avoided.


1998.5 to 2014 EGT Probe Install - Thread Tapping

CAUTION: One effective way to avoid metal fragment contamination in your engine manifold is to apply grease in the tip of the drill bit and threads of your tap tool when drilling/tapping the hole in your manifold. Reduce pressure on the drill when the drill breaks through the manifold wall to reduce risk of pushing metal chips into the manifold.

1. Obtain a 1/8"-27 NPT Thread Tap available at most hardware stores.
2. Drill a 21/64" (5/16" optional) hole through the manifold wall.
3. Use the pipe tap to cut the threads in accordance to the pipe tap manufacturer's instructions and recommendations.
4. Remove the fitting from the Thermocouple and install by tightening the tapered thread end into the manifold.
5. Tighten the fitting so that it is securely seated.

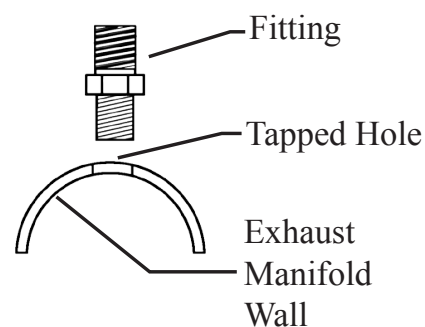


NOTE: Ideally the tip of the fitting would be less than or flush with the inside of the exhaust flow path.

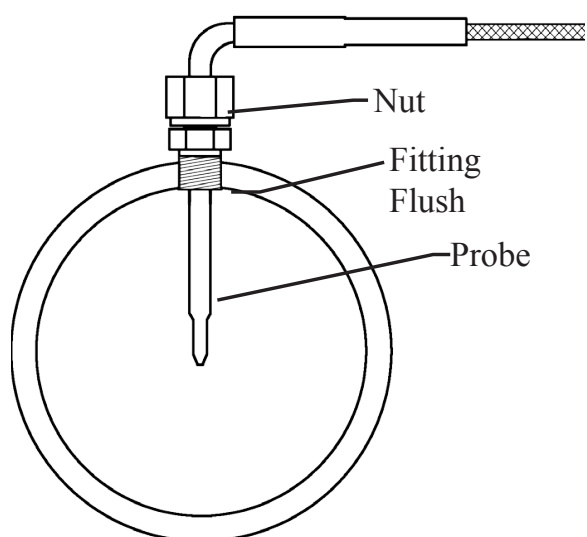



6. Install the probe into the fitting, and tighten the nut tight enough to keep the probe firmly mounted.

7. Make sure that the probe cable is positioned to allow best path and minimal bending for routing to the fire wall.

NOTE: The probe will move approximately 90 Deg. clockwise in the direction the nut is tightened. Before fully tightening the nut, make sure the cable starts 90 Degrees from the final resting position. When tightened, the cable will be correctly positioned.

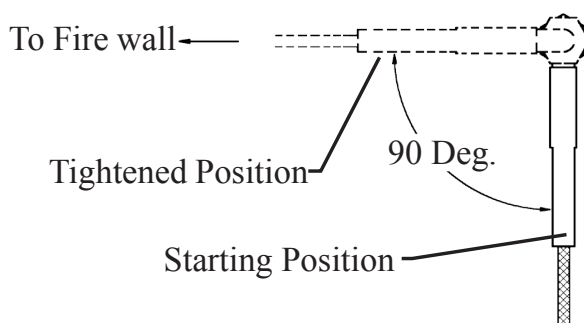


CAUTION: Do not bend the probe after installed. If needed, loosen the probe nut, adjust the probe, and re-tighten. Bending the probe tubing will result in a faulty probe.

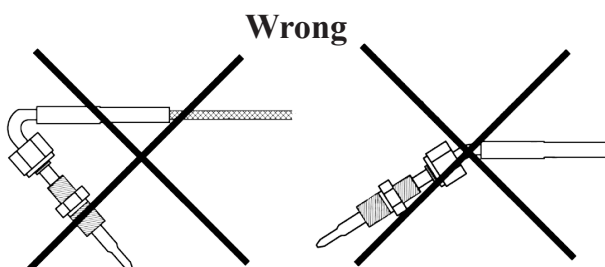


DO NOT BEND!!

1998.5 to 2014 EGT Probe Install - Juice Connection

1. Slide the shrink tube pieces over the two wires. Later you will slide them over the bolted connections.

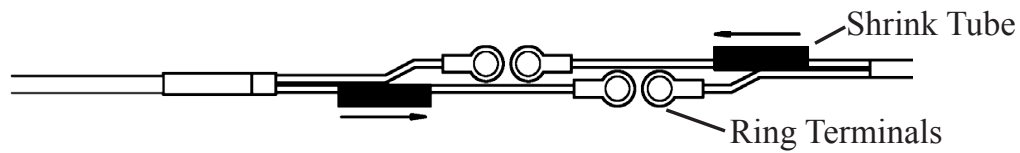


2. Connect the (2) ring terminals to the mating Juice harness terminals using the supplied hardware. Yellow to Yellow. Red to Red.

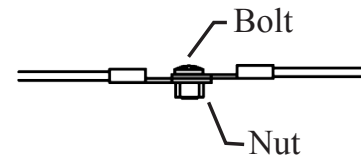

3. Tighten the nuts so that each wire is in line with its mating wire.

4. Position the supplied shrink tube over the secure fasteners.

5. Center the connection within the shrink tube. Heat and shrink the tubing over the connections.




6. Secure the excess cable to the fire wall over hang with supplied zip ties.

1998.5 to 2014 JAB Install - EAS Connections


NOTE: The CS/CTS will not function unless the JAB is properly installed and plugged into both the Juice Module and Attitude Monitor (CS/CTS).

1. Locate the green connector on the Juice Harness and plug it into the Green connector on the JAB.
2. Under the hood, connect the 3 EAS components to one another. A “click” will be felt and heard indicating that the connectors are correctly fastened.

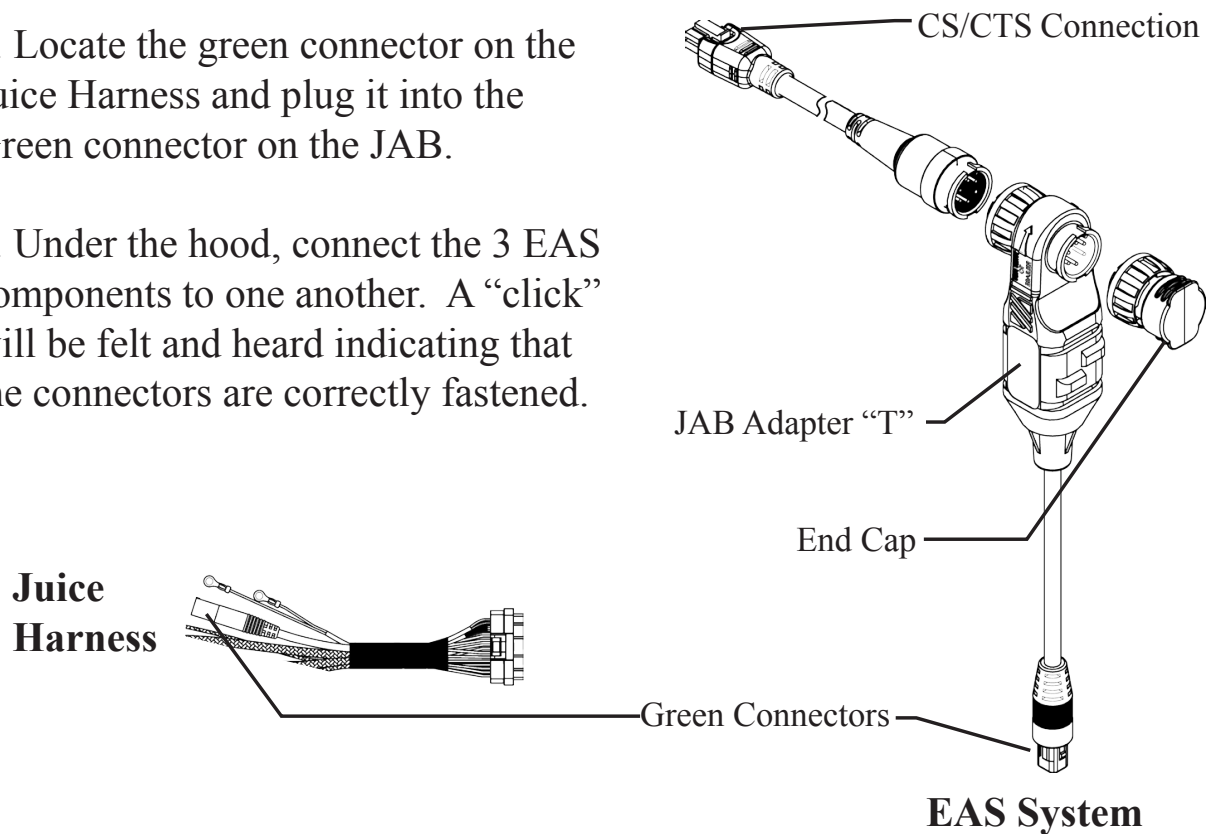

1998.5 to 2014 JAB Install - Cable Routing


1. Route the CS/CTS Connector and cable through the fire wall grommet. The JAB and Juice Module will remain under the hood.

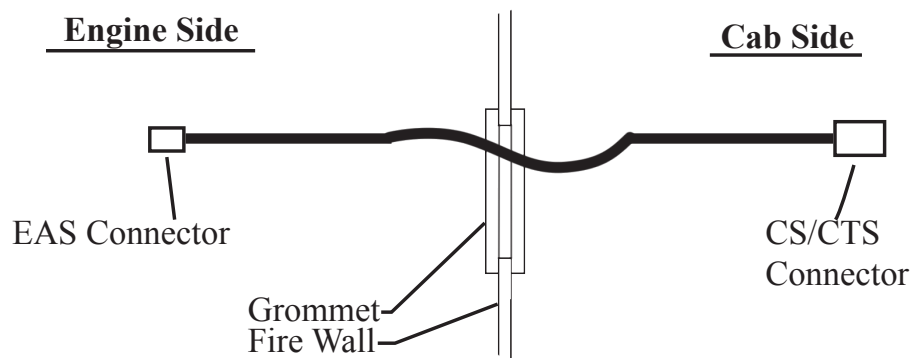

1998.5 to 2014 JAB Install - Cable Routing Cont'd


2. Route the cable from below the dash up to the lower left corner of the driver side windshield.
3. If needed, remove side panels to help see while routing.
4. Leave enough length between the dash and the end of the CS/CTS connector for easy CS/CTS install.


NOTE: For a clean look, the cable can be hidden behind the dash plastic and the door frame weather strip.

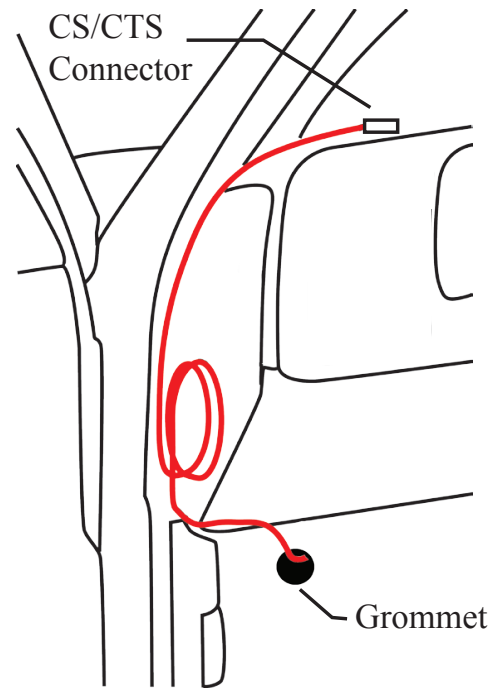

1998.5 to 2014 JAB Install - Fastening the EAS

1. Using the supplied zip ties, fasten the EAS connectors underneath the overhang which runs across the top of the fire wall.
2. Keep the JAB assembly close to the driver side.

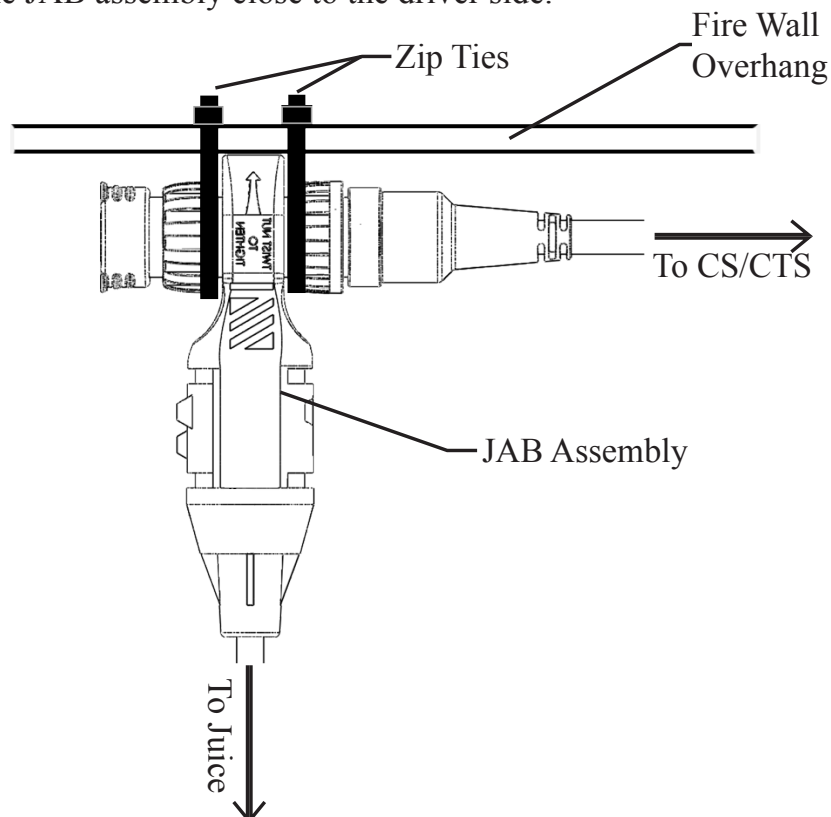

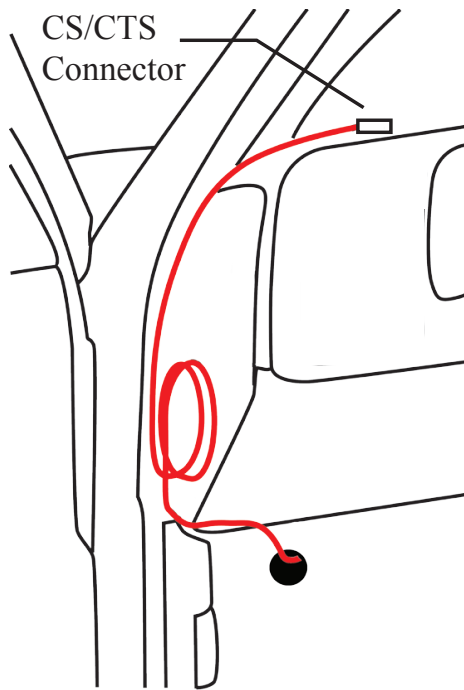

1. Locate the remaining Attitude Connector on the already installed DATA/OBDII Cable.


2. Route the Attitude Connector and remaining cable to the lower left corner of the driver side windshield.

NOTE: *This cable should already be inside the cab and underneath the dash.*

3. Leave enough length between the dash and the end of the CS/CTS connector for easy CS/CTS install.

NOTE: *For a clean look, the cable can be hidden behind the dash plastic and the door frame weather strip.*


4. Plug the CS/CTS Connector into the proper mating connector on the back of the CS/CTS Display

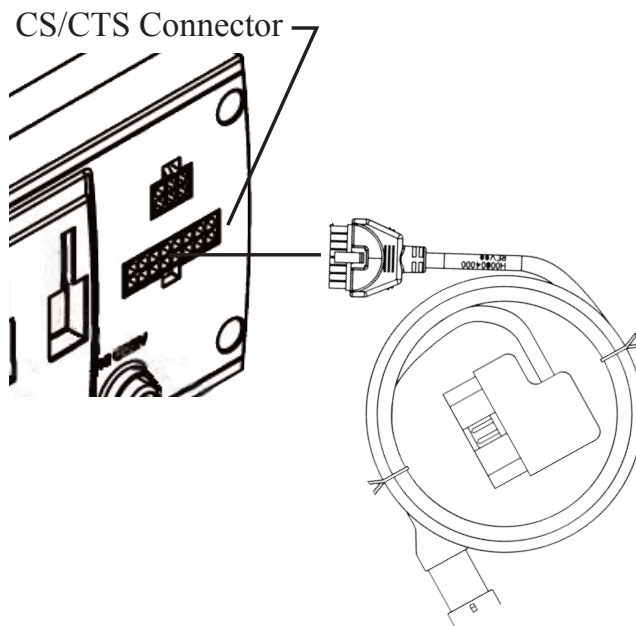

5. Depending on your mounting style, refer to the following for proper installation:

- (a) Arkon Mount: Quick Install Guide
- (b) POD Mount: POD Install Manual


1998.5 to 2014 Final Installation - Juice Module

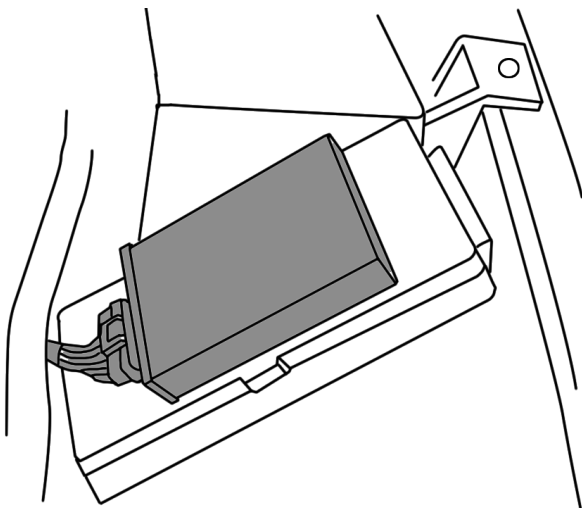

1. Attach one side of each velcro strip to the back side of the Module and to the top side of a flat surface under the hood.

NOTE: *The best place is the top of the fuse box on the driver side. This will secure the Juice module and help keep it away from any moving and/or hot parts under the hood.*

2. Plug the “Main Juice Connector” into the “Juice Module” receptacle.

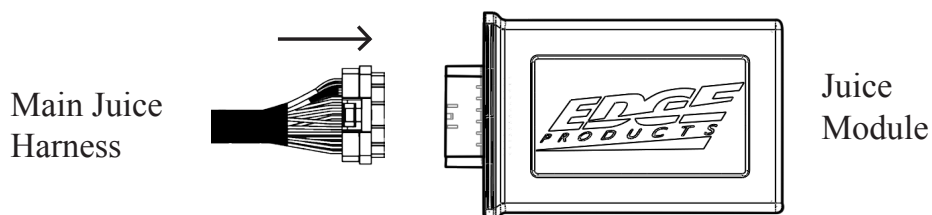

3. Refer to the CS/CTS User Manual for detailed descriptions on how to operate the Attitude Monitor.

1998.5 to 2014 Final Installation - Reconnect

1. Recheck all connections for a properly secure installation. Using the supplied wire ties, secure the wiring harness and cable to prevent possible heat damage from hot engine surfaces.

2. Reconnect the battery cables.

3. Start the engine. The engine should start and idle like a stock truck. If the engine does not start or run properly, turn off the engine. Remove the keys from the ignition, and check the Juice module connections. Make sure all connectors are fastened tightly. If you continue to have problems, contact your dealer or Edge Products, LLC.

Product Registration

PLEASE take the time to register your product on line at [edgeproducts.com](http://www.edgeproducts.com/product_registration.php). Follow the instructions at link: http://www.edgeproducts.com/product_registration.php

BENEFITS OF PRODUCT REGISTRATION

-Your Safety - Registering your product allows us to know exactly which product you have and provide important product updates to you that improve the quality and/or safety of the product.

-Enhanced Features - Almost all Edge products are easily updated via the internet. We are constantly adding new features and improvements to our product that we know you will want to enjoy.

-Confirmation of Ownership - Provides a record in case of product loss, theft, or required warranty work. When you call us for support our team will already have much of the information they need to help you.

-Improved Product Development - Helps us better understand you (our customer) and design products that meet your needs.

-Special Offers - Allows us to inform you about special offers on accessories and/or new products that fit your vehicle and enhance your driving experience.

Additional Information

IMPORTANT: Read all Safety, Warranty, and Installation Instructions in this manual and the CS/CTS User Guide before installing the product you have purchased.

Throughout this User Guide (hereafter noted as Installation Instructions) you will see important messages regarding your safety or the protection of your vehicle. These messages are designated by the words WARNING or CAUTION.



WARNING indicates a condition that may cause serious injury or death to you, your passengers or others nearby. Pay careful attention to these Warning messages, and always comply with them. They could save a life.

CAUTION indicates a condition that could cause damage to your vehicle. It is important to install and operate your EDGE product in conformance with instructions in this Manual. Caution alerts you to particularly important things that will keep your vehicle operating properly.



WARNING Do not program your vehicle in remote location in case of vehicle failure.

If you have used another tuner / programmer on your truck, you will need to program your truck back to stock before using the Attitude or Juice.

Failure to return to stock may result in PCM failure or engine damage.

All Edge modules and programmers are built to operate with OEM calibrations. When you take your vehicle to a service center they may, by your request or otherwise, update your vehicle's calibrations. Therefore it is important that you return your vehicle to stock before taking it in for service. Edge updates its active products (i.e. those currently being manufactured) to work effectively with updated OEM calibrations. However, this process can take some time as Edge is not always made aware of calibration changes made by the OEM. In the case of discontinued products, Edge cannot ensure that your unit will work effectively if you take your vehicle to a dealership and you are given, by your request or otherwise, a new calibration.

COPYRIGHT© 2011 REV 05

For additional questions not found in the user guide call:

Edge Products Technical Support: (888) 360-EDGE (3343) 8:00 am - 5:00 pm MST

**To expedite your support call, please have your Vehicle Information,
Part Number, and Serial Number ready prior to calling Technical Support.**

**The Edge Products information is found on the label located
on the bottom of the device.**